
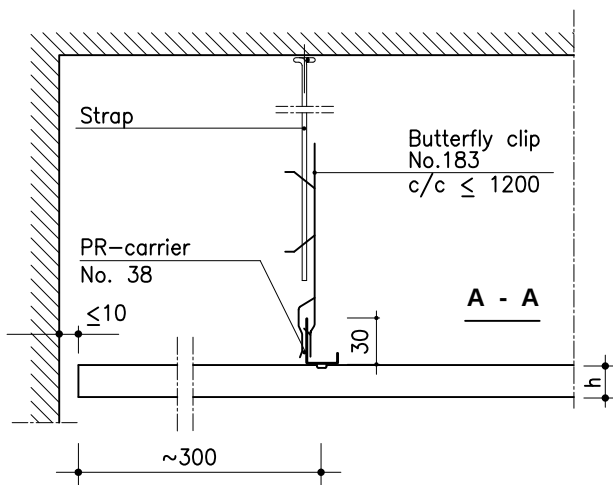


PROFILE LAUTEX PR-U

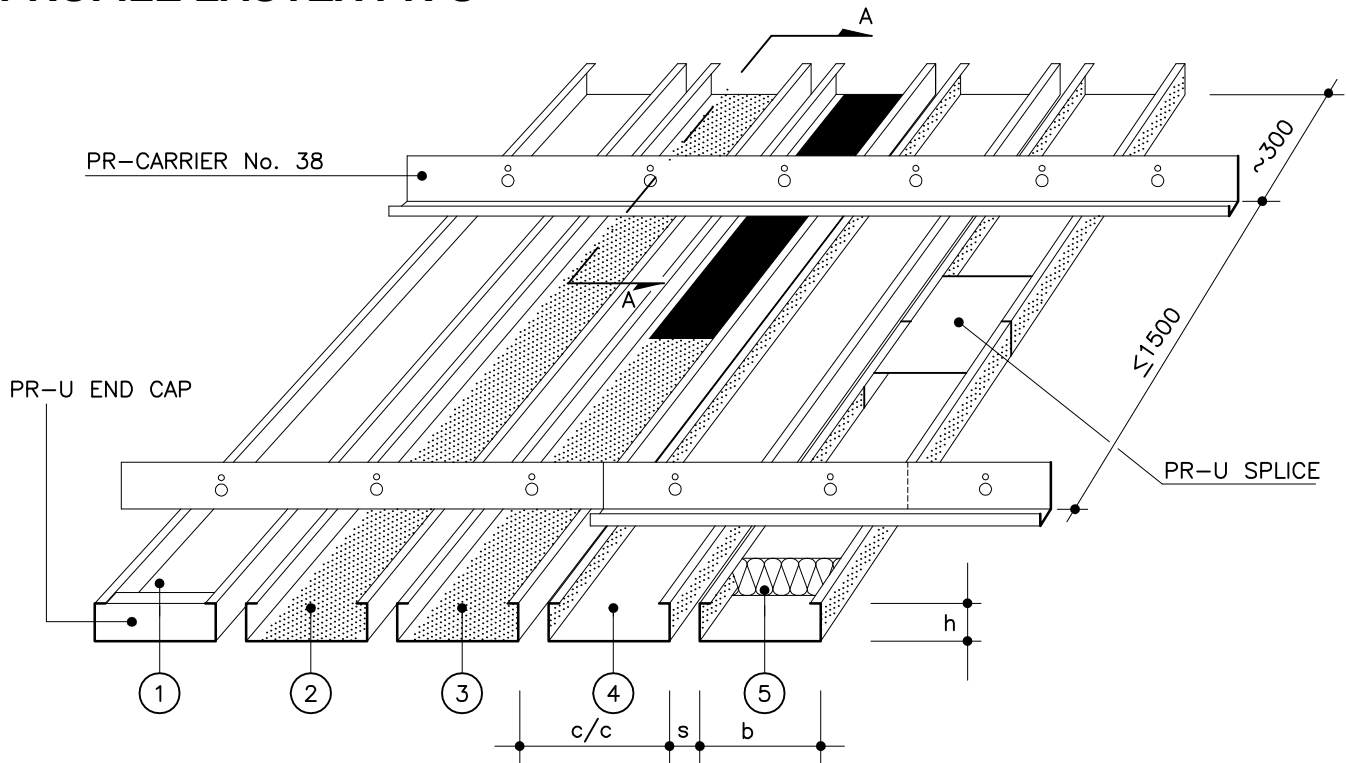

- ① = PR-U; unperforated without acoustic inlay
- ② = PR-UR; perforated from the bottom when width >60 mm
- ③ = PR-URT; perforated with acoustic inlay >60 mm
- ④ = PR-UR; perforated from the sides when width <60 mm
- ⑤ = PR-URT; perforated from the sides and wool in plastic
If color is LTX-101 standard white, the standard inlay is acoustic felt

PR-U -PROFILE

Material	0.4 Al				0.5 Al		0.7 Al
Width b, mm	30	40	50	60	80	100	180
Height h, mm	40	35	30	25	25	20	25
Length	1250-6500 mm						
Air space s	20 mm						
Perforation							
- width <60 mm	ø2.0 mm at the sides						
- width 60-100 mm	ø1.1 mm at the bottom						
- width 180 mm	ø2.0 mm at the bottom						
Inlay							
- width ≥60 mm	acoustic felt						
- width <60 mm	wool in plastic If the color is LTX-101 standard white, standard inlay will be acoustic felt.						
Finish	stove enamelling						

SPECIAL PR-U -PROFILE

Material	0.7 Al, 0.5 Steel, 0.5 Al						
Width b, mm	20	30	30	50	70	135	140
Height h, mm	45	30	50	45	20	27.5	25
Length	<1250 mm						
Air space s	20 mm						
Perforation	ø2.0 mm at the sides or bottom						
Inlay	wool in plastic						
Finish	plastic coating (Steel) high gloss anodized (Al)						
PR-list for diagonal mounting (45°)	Will be used with profiles of width of ≥50 mm. Air space according to order but ≥10 mm.						
Other special solutions	Please, contact our technical information department.						

STRUCTURAL DETAILS SEE LEAFLET 6.1

All products are subject to modifications without prior notice.
2011