


LAUTEX CARRIERS

Material: Steel, Length=3000 unless otherwise stated


PAGE 1/4

No. 39.1 PR-CARRIER 45° INSTALLATION


CARRIER No.	PROFILE'S WIDTH	c/c	APPROX. LENGHT
39C	50	60	2968
39D	60	70	2967
39E	70	80	2941
39F	80	90	2928
39G	90	100	2969
39H	100	110	2956
39J	135	145	2873
39K	140	150	2969
39L	180	190	2956
39M	190	200	2828
39N	280	290	2871
39P	290	300	2970
39X	ACCORDING TO ORDER BUT ≥ 50 mm	ACCORDING TO ORDER BUT MIN. AIR SPACE 10 mm	




No. 42 H-CARRIER c/c 600 mm

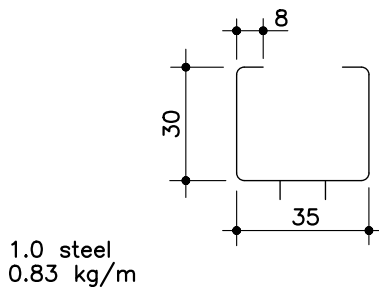


No. 42R H-CARRIER c/c 585 mm

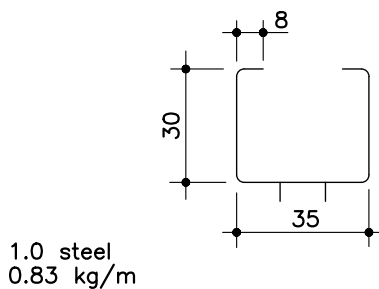

No. 43A UP-CARRIER




No. 43D UP-CARRIER FOR UP-300 AND 200/25




No. 44 PR-CARRIER

CARRIER No.	PROFILE'S WIDTH	c/c	LENGTH
44A	30	40	3000
44B	40	50	3000
44C	50	60	3000
44D	60	70	2940
44E	70	80	2960
44F	80	90	2970
44G	90	100	3000
44H	100	110	2970
44J	135	145	2900
44K	140	150	3000
44L	180	190	2850
44M	190	200	3000
44N	280	290	2900
44P	290	300	3000
44X	ACCORDING TO ORDER	ACCORDING TO ORDER BUT MIN. AIR SPACE 10 mm	




No. 45 K-CARRIER INSTALLATION WITH AIR SPACE

CARRIER No.	PANEL'S WIDTH	c/c	LENGTH
45A	100	105	2940
45B	100	110	2970
45C	150	155	2945
45D	150	160	2880
45E	200	205	2870
45F	200	210	2940
45G	300	305	2745
45H	300	310	2790
45X	X	X	X




No. 46 K-SEAM CARRIER

CAN BE USED FOR CARRIERS
No. 45 AND 47

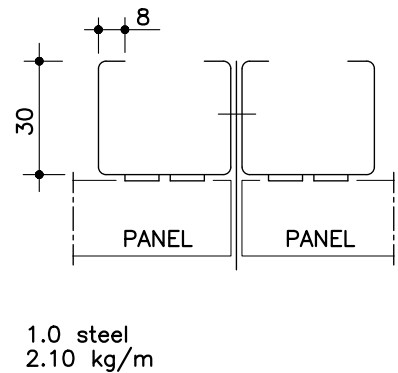

No. 47 STANDARD K-CARRIER




LAUTEX CARRIERS


Material: Steel, Length=3000 unless otherwise stated

PAGE 2/4

No. 47B K-CARRIER
FLANGES OUTWARDS




No. 47C BENT K-CARRIER

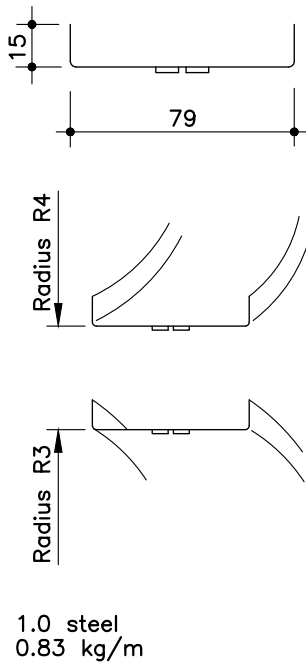


No. 49 K-WALL CARRIER
INSTALLATION WITH AIR SPACE

CARRIER No.	PANEL'S WIDTH	c/c	LENGTH
49A	100	105	2940
49B	100	110	2970
49C	150	155	2945
49D	150	160	2880
49E	200	205	2870
49F	200	210	2940
49G	300	305	2745
49H	300	310	2790
45X	X	X	X

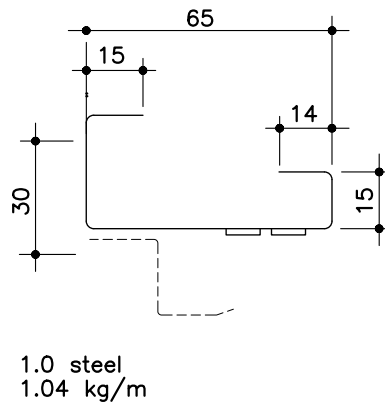


No. 54 SPRING-T-CARRIER




0.5 steel, L=4000
0.44 kg/m

No. 55 SUPPORT PROFILE

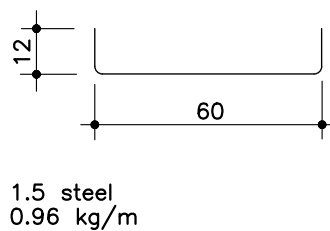


No. 56 SUPPORT TUBE



1.5 steel, L=6000, Painted
1.37 kg/m

No. 87 BENT K-CARRIER

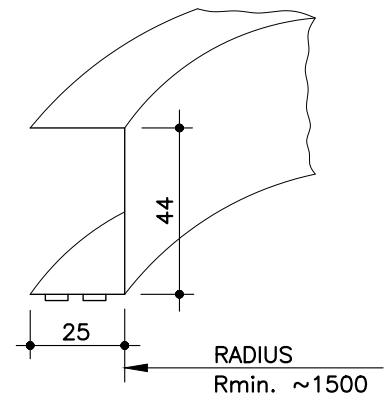

THE WIDTH AND c/c OF THE
PANEL CAN BE CHOSEN FREELY

1.0 steel, L=3000
0.72 kg/m




LAUTEX CARRIERS

Material: Steel, Length=3000 unless otherwise stated


PAGE 3/4

No. 88 BENT PR-CARRIER

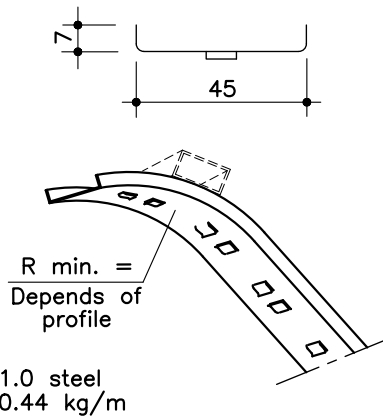


CARRIER No.	PROFILE'S WIDTH	c/c	APPROX. LENGTH
88A	30	40	3000
88B	40	50	3000
88C	50	60	3000
88D	60	70	2940
88E	70	80	2960
88F	80	90	2970
88G	90	100	3000
88H	100	110	2970
88J	135	145	2900
88K	140	150	3000
88L	180	190	2850
88M	190	200	3000
88N	280	290	2900
88P	290	300	3000
88X	ACCORDING TO ORDER	ACCORDING TO ORDER BUT MIN. AIR SPACE 10 mm	


No. 89 BENT PR-CARRIER

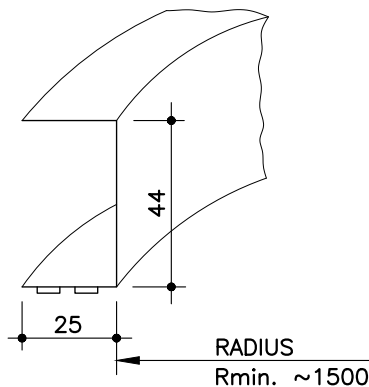


No. 90 SUSPENSION CARRIER




No. 91 UP-CARRIER 45° LEFT INSTALLATION



No. 92 UP-CARRIER 45° RIGHT INSTALLATION




No. 94 NS-CARRIER FOR B0 AND C-CLASS CEILINGS




No. 95 HALF SPRING-T-CARRIER


FOR INSTALLATION OF NJ-CASSETTES WITH AIR SPACE



No. 96A UP-WALL CARRIER FOR RIGHT INSTALLATION

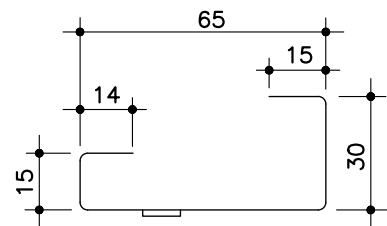

No. 96B UP-WALL CARRIER FOR LEFT INSTALLATION

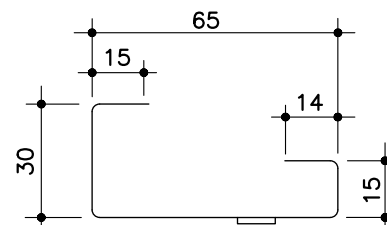


LAUTEX CARRIERS

Material: Steel, Length=3000 unless otherwise stated


PAGE 4/4

No. 98 UP-WALL CARRIER FOR BOTH HAND INSTALLATION FOR B0/B15 CEILINGS

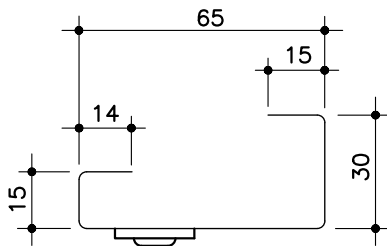

1.0 steel
1.04 kg/m


No. 105 PRE-ASSEMBLED HALF SPRING-T-CARRIERS



CARRIER No.	AIR SPACE
105A	3 mm
105B	4 mm
105C	5 mm
105D	6 mm
105E	7 mm
105F	8 mm
105H	10 mm
105M	15 mm
105R	20 mm

0.6 steel, Length=4000
2.76 kg/m

No. 100 UP-SEAM CARRIER
CAN BE USED FOR CARRIER No. 43



1.0 steel
2.10 kg/m

