


MARINE PANEL LAUTEX KS-200

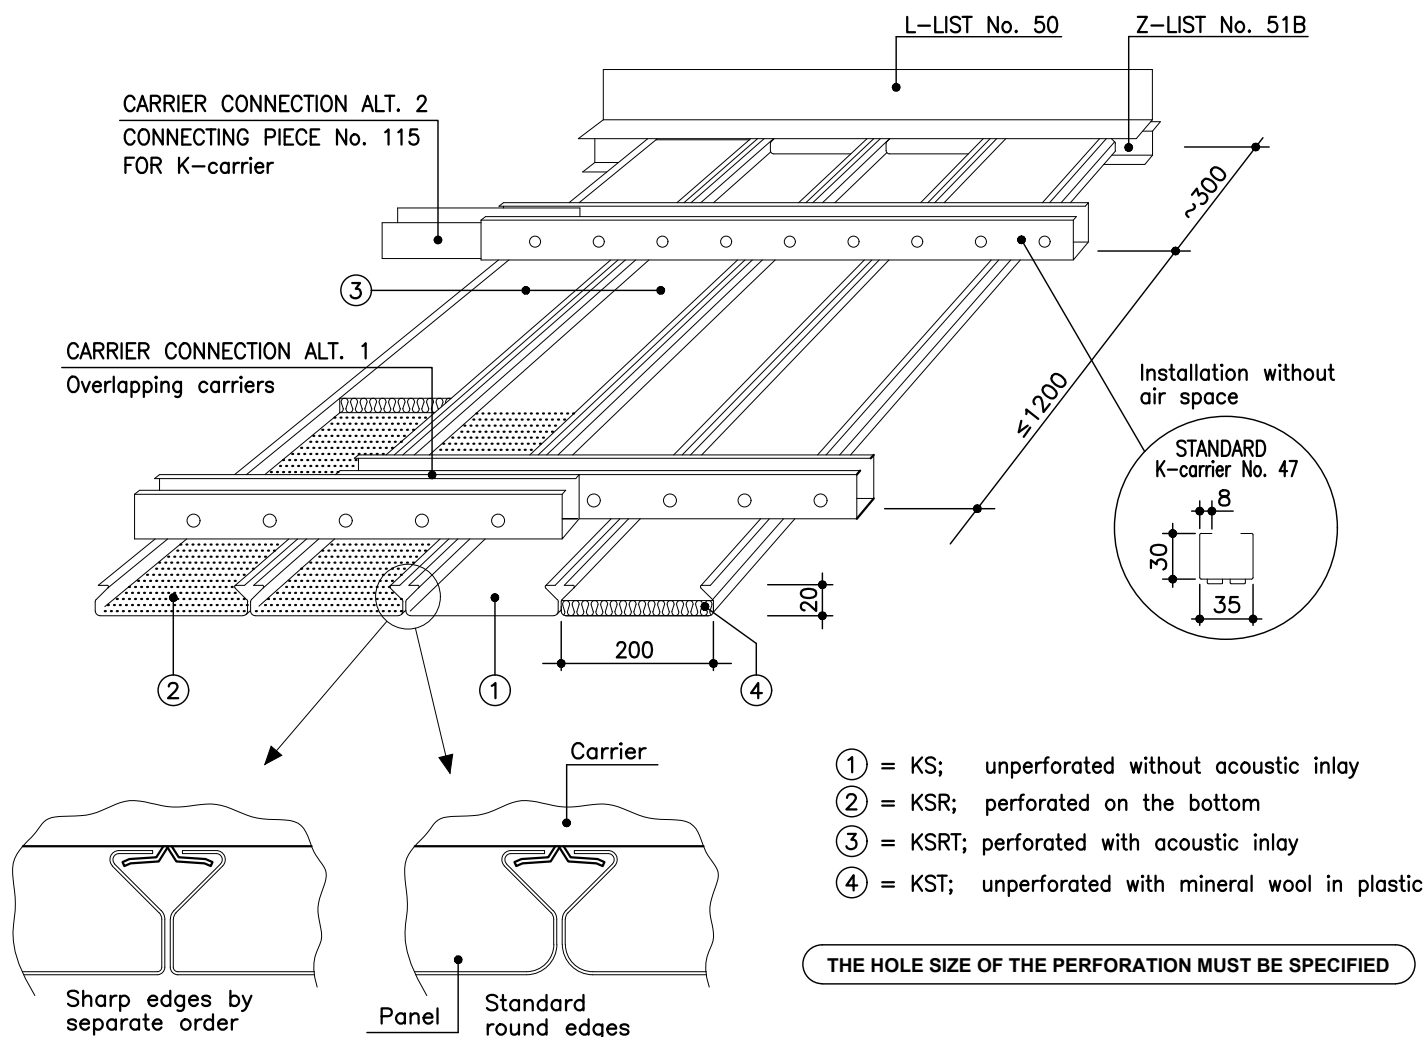


KS-200 PANELS / CLASSIFICATION "C"

Material	0.7 Al
Width	200 mm
Height	20 mm
Length	max 6500 mm
Perforation	Ø 2.0/15 % other alternatives see "perforations"
Inlay	mineral wool in plastic or acoustic felt
Finish	NCS S or RAL color
Ventilation	installation with air space 5 or 10 mm, also according to order, min. 4 mm
Protective film	upon request
Suspension	see "Suspension system for panels" page 27
Edge lists	see group 6 "Lautex lists" and page 28 "Lautex marine panels typical details"
Other solutions	please contact Lautex sales

MARINE PANEL LAUTEX KS-200

INSTALLATION ACCESSORIES


INSTALLATION WITH AIR SPACE 5 AND 10 MM (ALSO ACCORDING TO ORDER; MIN. 4 MM)

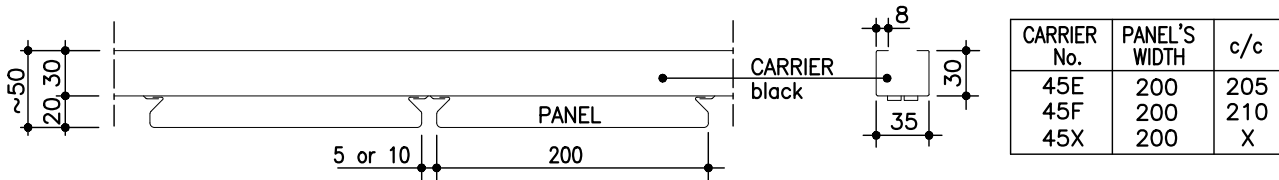

LOUDSPEAKER PANEL


EXPAMET NET PANEL

Type 226F
Open area 46 %

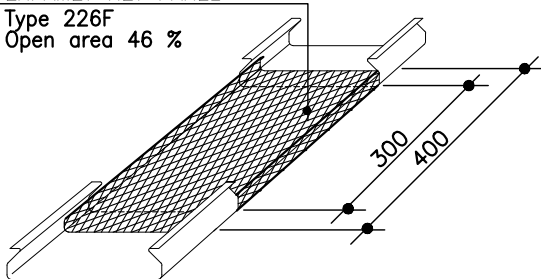


DOWNLIGHT OR LOUDSPEAKER PANEL

Ø According to order
or perforated on the
whole bottom
Ø3.5/25 %

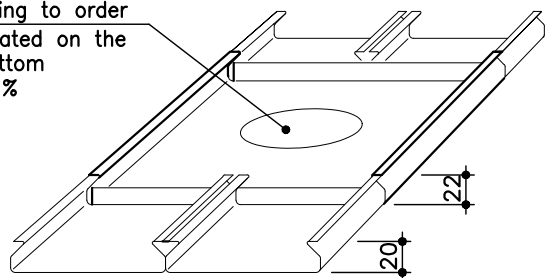

STANDARD SERVICE HATCH

LENGTH x WIDTH (opening in the ceiling)
400 x 400
600 x 600

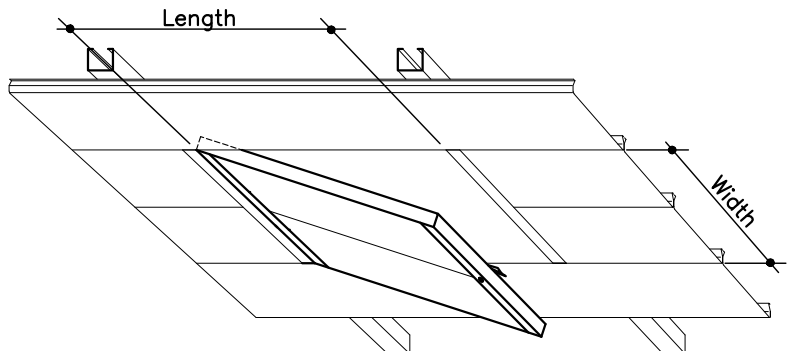

SOLUTIONS OF PANEL EXTENSION AND PANEL CONNECTION TO WALL PLEASE SEE PAGE 28

THEORETICAL NEED OF SUSPENSION STRUCTURES

Product	Need of material
Carrier No. 45, 47	1.2 – 1.6 m/m ²
Carrier lock	1 pcs/carrier meter
L-list No. 50	0.8 – 1.4 m/m ²
Z-list No. 51B	0.8 – 1.4 m/m ²

WEIGHT OF PANELS KG / M²

	KS-200	
Material	0.7 Al	0.5 steel
Weight	2.36	5.00

WEIGHT OF OTHER CEILING MATERIALS

Product	Weight of material
Mineral wool in plastic	0.52 kg/m ²
Carrier No. 45 or 47	0.83 kg/m
Carrier lock	0.08 kg/pcs
L-list No. 50 or 83 (1.5 Al)	0.32 kg/m
L-list No. 50 or 83 (1.0 Steel)	0.62 kg/m
Z-list No. 51B (1.0 Al)	0.15 kg/m