


MARINE PROFILE LAUTEX PR-A

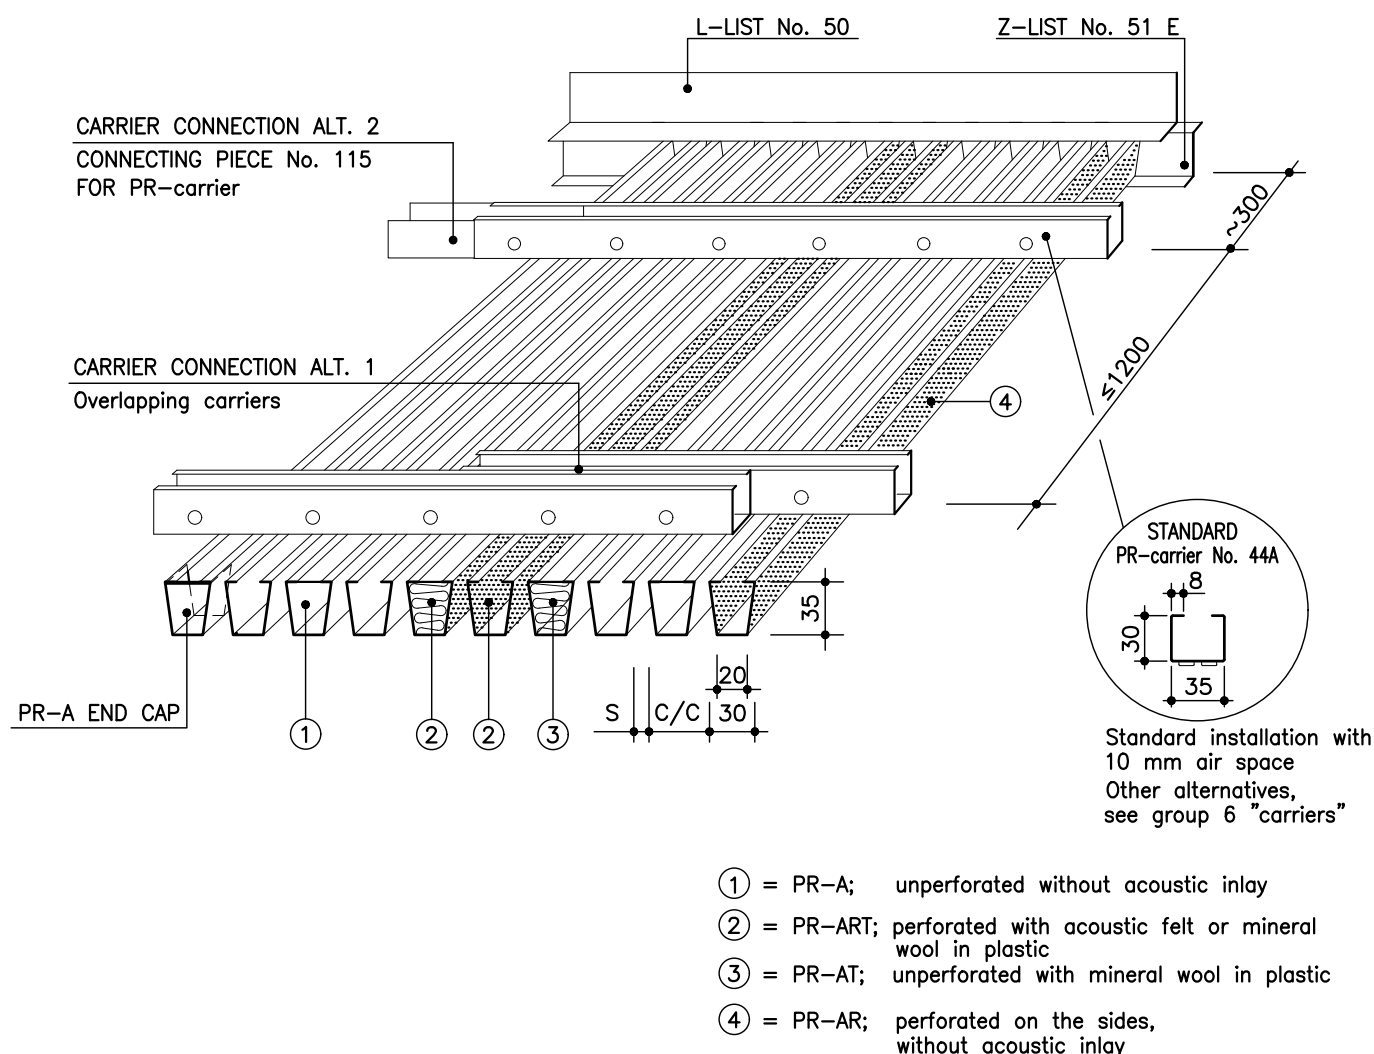


PR-A PROFILES / CLASSIFICATION "C"

Material	0.4 Al
Width	20 / 30 mm
Height	35 mm
Length	max 5000 mm
Air spaces	recommended air space = 10 mm also according to order, but ≥ 10 mm
Perforation	$\varnothing 2.0/15$ %, other alternatives see "perforations"
Inlay	mineral wool in plastic
Finish	NCS S or RAL color
Protective film	the surface is provided with a protective film if required
Loudspeaker profile	see overleaf
Downlight unit	see overleaf
Connecting piece	No. 181i see pages 22 & 23
Curved ceilings	see "Curved ceilings and diagonal installation"
Suspension	see "Suspension systems for profiles"
Edge lists	see "Lists" and "Lautex marine profiles typical details"
Other solutions	please contact Lautex sales


MARINE PROFILE LAUTEX PR-A INSTALLATION ACCESSORIES

INSTALLATION WITH AIR SPACE 10 MM

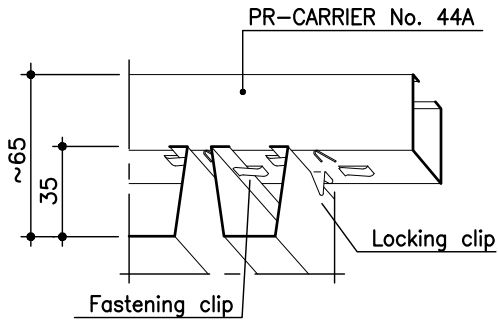


LOUDSPEAKER PROFILE

EXPAMET NET PROFILE
Type 226F
Open area 46 %

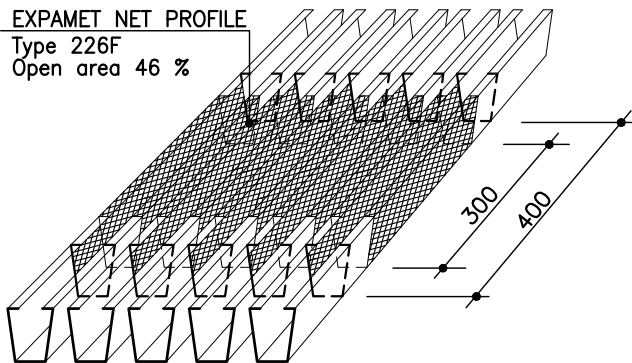

DOWNLIGHT OR LOUDSPEAKER PROFILE

Ø According to order or
perforated on the middle
area Ø3.5/25 %

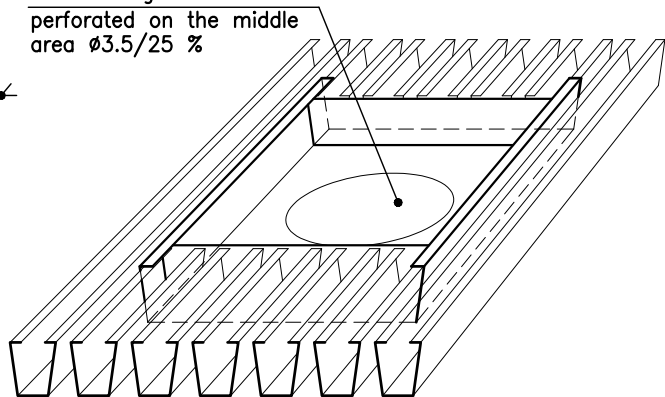

SOLUTION OF PROFILE EXTENSION AND PROFILE CONNECTION TO WALL PLEASE SEE PAGES 22 & 23

THEORETICAL NEED OF SUSPENSION STRUCTURES

Product	Need of material
Carrier No. 44A	1.2 – 1.6 m/m ²
Carrier lock	1 pcs / carrier meter
L-list No. 50	0.8 – 1.4 m/m ²
Z-list No. 51E	0.8 – 1.4 m/m ²

WEIGHT OF PROFILES KG / M²

PR-A	
Material	0.4 Al
Weight	2.70

WEIGHT OF OTHER CEILING MATERIALS

Product	Weight of material
Mineral wool in plastic	0.52 kg/m ²
Carrier No. 44A	0.83 kg/m
Carrier lock	0.08 kg/pcs
L-list No. 50 or 83 (1.5 Al)	0.32 kg/m
L-list No. 50 or 83 (1.0 Steel)	0.62 kg/m
Z-list No. 51E (1.0 Al)	0.17 kg/pcs
L-list No. 85A (1.0 Al)	0.15 kg/pcs