


MARINE PROFILE LAUTEX PR-W

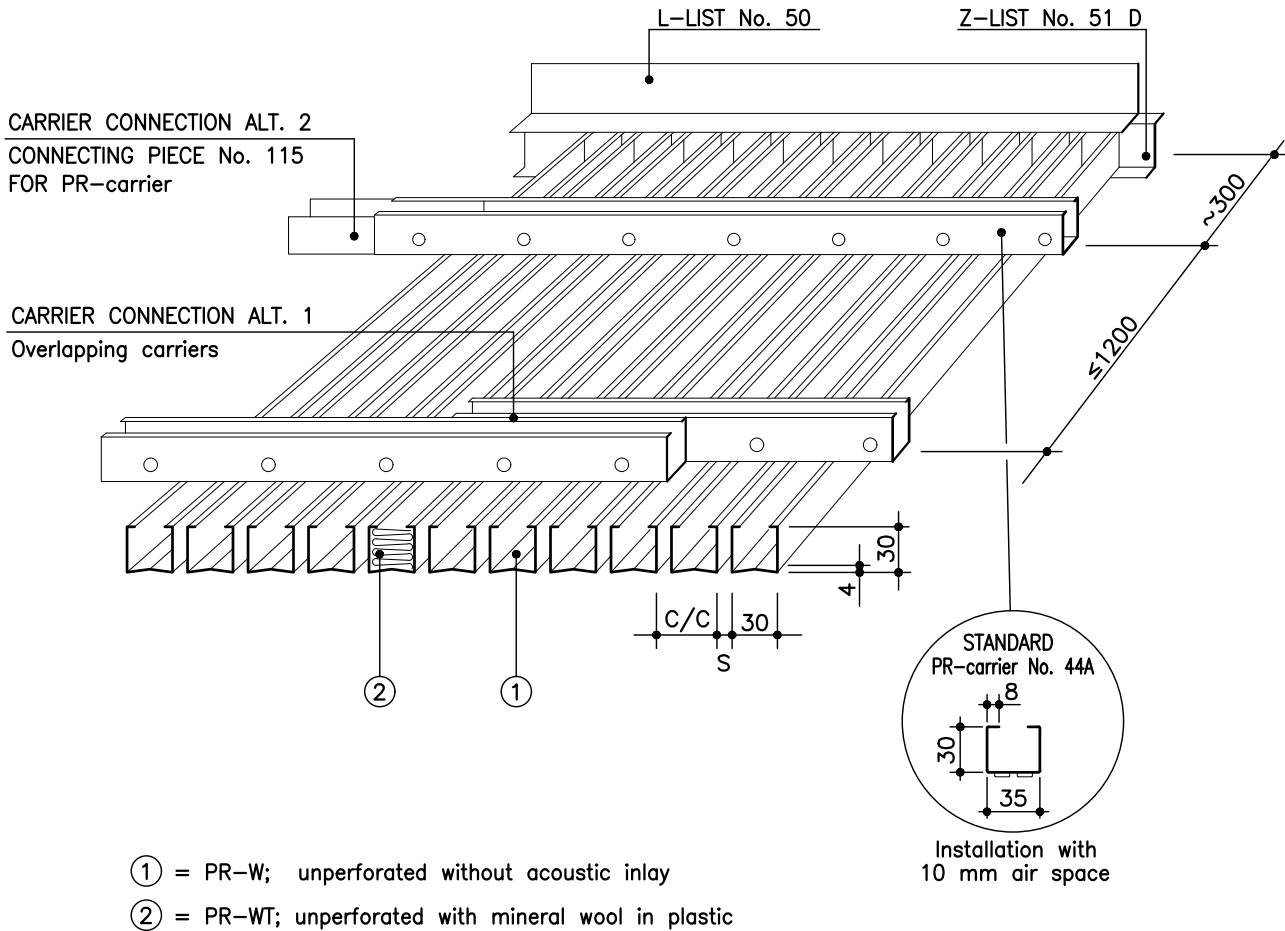


PR-W PROFILES / CLASSIFICATION "C"


Material	0.4 Al
Width	30 mm
Height	30 mm
Length	max 5000 mm
Air spaces	recommended air space = 10 mm also according to order, but ≥ 10 mm
Perforation	none
Inlay	mineral wool in plastic
Finish	NCS S or RAL color
Protective film	the surface is provided with a protective film if required
Connecting piece	No. 189E
Curved ceilings	see "Curved ceilings and diagonal installation"
Suspension	see "Suspension systems for profiles"
Edge lists	see "Lautex lists and Lautex marine profiles typical details"
Other solutions	please contact Lautex sales

MARINE PROFILE LAUTEX PR-W INSTALLATION ACCESSORIES

INSTALLATION WITH AIR SPACE 10 MM

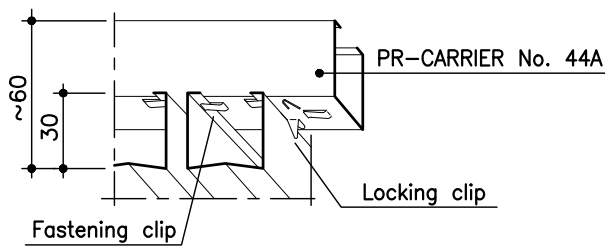

DOWNLIGHT OR LOUDSPEAKER PROFILE

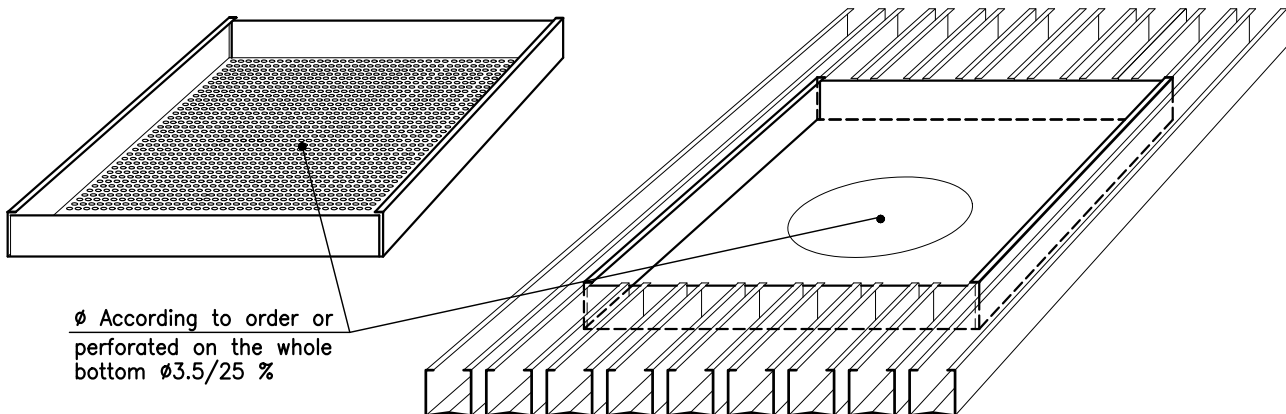

SOLUTION OF PROFILE EXTENSION AND PROFILE CONNECTION TO WALL PLEASE SEE PAGES 22 & 23

THEORETICAL NEED OF SUSPENSION STRUCTURES

Product	Need of material
Carrier No. 44A	1.2 – 1.6 m/m ²
Carrier lock	1 pcs / carrier meter
L-list No. 50	0.8 – 1.4 m/m ²
Z-list No. 51D	0.8 – 1.4 m/m ²

WEIGHT OF PROFILES KG / M²

PR-W	
Material	0.4 Al
Weight	2.70

WEIGHT OF OTHER CEILING MATERIALS

Product	Weight of material
Mineral wool in plastic	0.52 kg/m ²
Carrier No. 44A	0.83 kg/m
Carrier lock	0.08 kg/pcs
L-list No. 50 or 83 (1.5 Al)	0.32 kg/m
L-list No. 50 or 83 (1.0 steel)	0.62 kg/m
Z-list No. 51D (1.0 Al)	0.18 kg/pcs