



MARINE PANEL LAUTEX UP-200 / 15

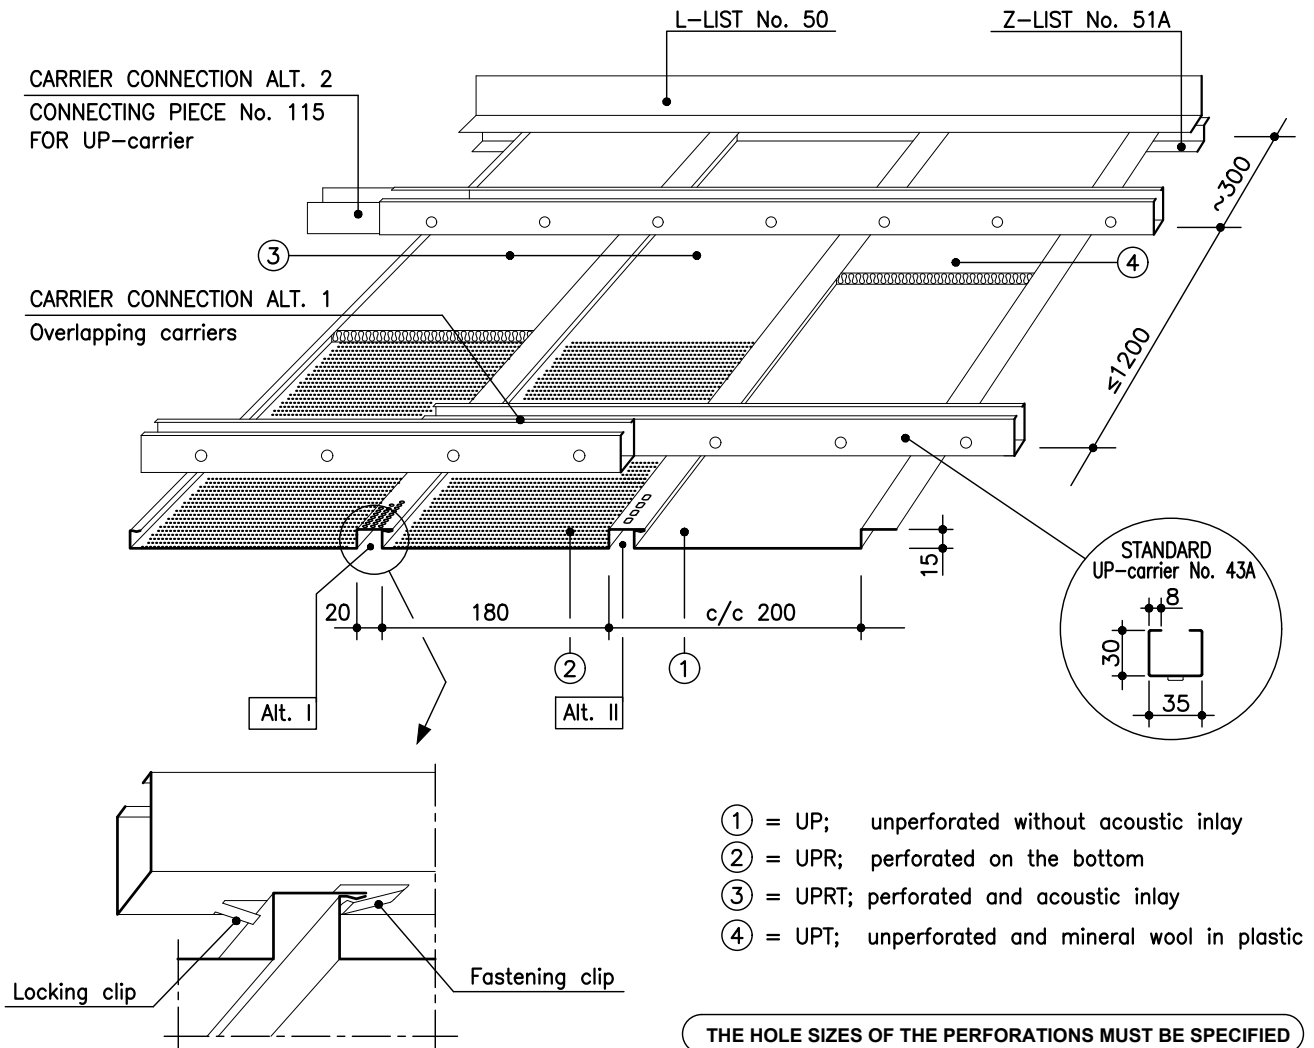


UP-200 PANELS / CLASSIFICATION "C"

Material	0.7 Al 0.5 Steel
Width	200 mm
Height	15 mm
Length	max 6500 mm
Perforation	Ø 2.0/15%, other alternatives see "Perforations"
Inlay	mineral wool in plastic or acoustic felt
Finish	NCS S or RAL color
Ventilation	alt I Ø 3.5 mm, c/c 6.25 mm = 46 cm ² /m alt II Ø 5x7 mm, c/c 13 mm = 23 cm ² /m Other alternatives see group 6 "Lautex ventilation perforations"
Protective film	the surface is provided with a protective film if required
End bendings	according to order
Suspension	see "Suspension systems for panels" page 27
Edge lists	see group 6 "Lautex lists" and page 28 "Lautex marine panels typical details"
Other solutions	please contact Lautex sales

MARINE PANEL LAUTEX UP-200 / 15 INSTALLATION ACCESSORIES

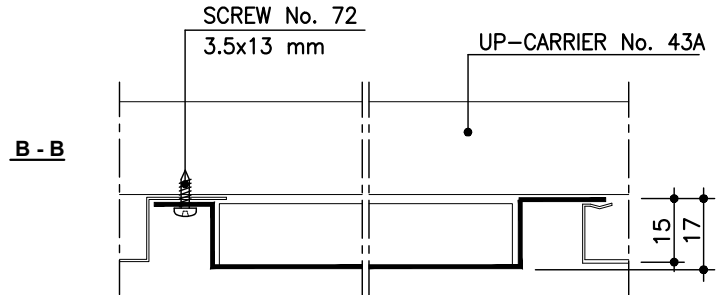


LOUDSPEAKER OR DOWNLIGHT PANEL

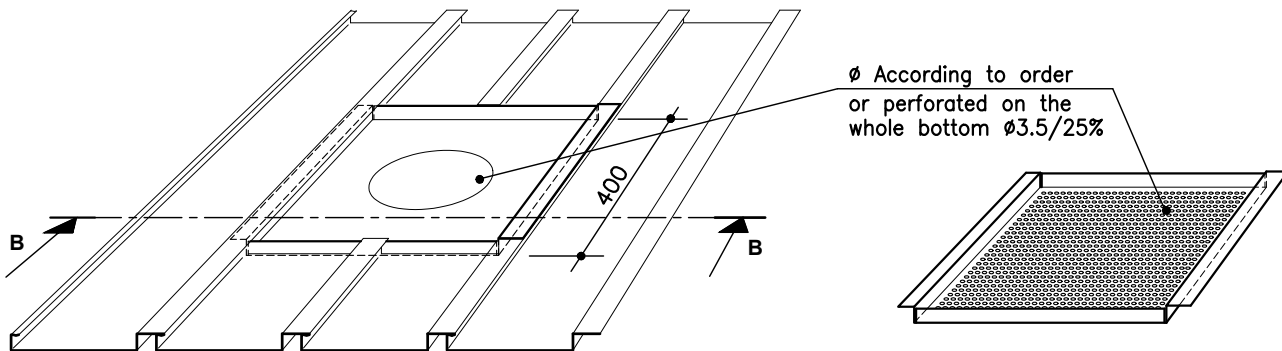

STANDARD SERVICE HATCHES

LENGTH x WIDTH (opening in the ceiling)	
400 x 400	
600 x 600	

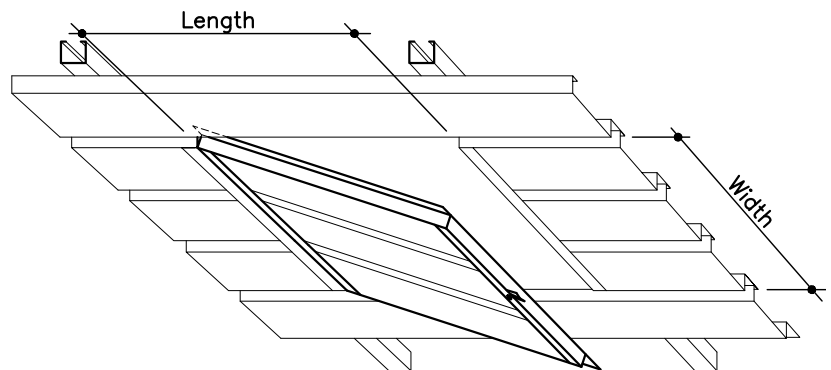

SOLUTION OF PANEL EXTENSION AND PANEL CONNECTION TO WALL PLEASE SEE PAGE 28

THEORETICAL NEED OF SUSPENSION STRUCTURES

Product	Need of material
Carrier No. 43A	1.2 – 1.6 m/m ²
Carrier lock	1 pcs/carrier meter
L-list No. 50	0.8 – 1.4 m/m ²
Z-list No. 51A	0.8 – 1.4 m/m ²

WEIGHT OF PANELS KG / M²

UP-200/15		
Material	0.7 Al	0.5 Steel
Weight	2.27	4.80

WEIGHT OF OTHER CEILING MATERIALS

Product	Weight of material
Mineral wool in plastic	0.52 kg/m ²
Carrier No. 43A	0.83 kg/m
Carrier lock	0.08 kg/pcs
L-list No. 50 or 83 (1.5 Al)	0.32 kg/m
L-list No. 50 or 83 (1.0 steel)	0.62 kg/m
Z-list No. 51A (1.0 Al)	0.14 kg/m