


MARINE PROFILE LAUTEX PR-UD

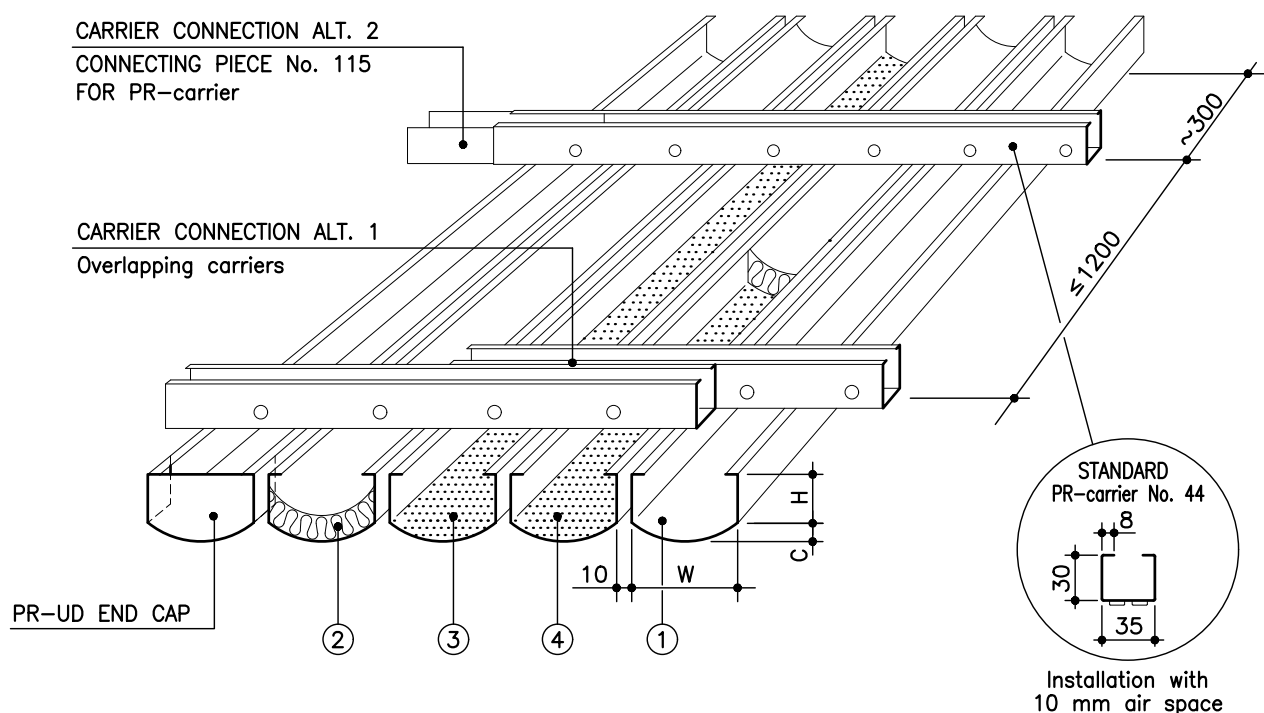

- ① = PR-UD; unperforated without acoustic inlay
- ② = PR-UDT; unperforated with mineral wool in plastic
- ③ = PR-UDR; perforated without acoustic inlay
- ④ = PR-UDRT; perforated with mineral wool in plastic


PR-UD PROFILES / CLASSIFICATION "C"

Profile	H mm	W mm	C mm	length max. mm	material	carrier No. air space 10 mm	connecting piece
32x70x32	32	70	12	4000	0.7 Al	44E	189J
35x110x35	35	110	20	4000	0.7 Al	44X	189K
40x200x40	40	200	23	4000	0.7 Al	44X	189L


Perforation	ø 2.0/15% other alternatives see group 6 "perforations"
Air spaces	recommended air space = 10 mm also according to order, but ≥ 10 mm
Inlay	mineral wool in plastic
Finish	NCS S or RAL color
Protective film	the surface is provided with a protective film if required
Suspension	see "Suspension systems for profiles"
Edge lists	see "Lautex lists" and "Lautex marine profiles typical details"
Installation with PR-UC	see overleaf
Diagonal installation	PR-carrier No. 39C...39X for diagonal installation in 45°, air space according to order but ≥ 10 mm, see "Curved ceiling and diagonal installation"
Other solutions	please contact Lautex sales

MARINE PROFILE LAUTEX PR-UD INSTALLATION ACCESSORIES

INSTALLATION WITH AIR SPACE 10 MM

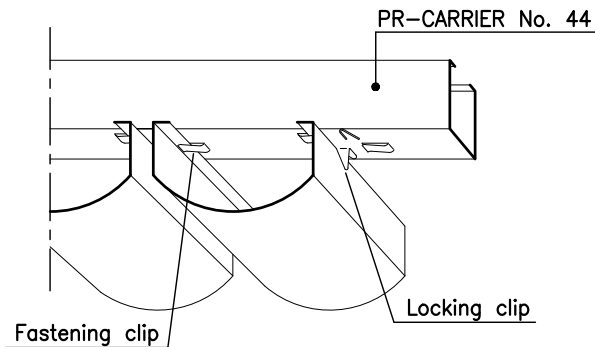


COMBINATION CEILING PR-UC / PR-UD

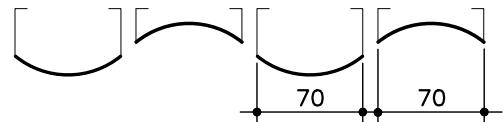


By combining profiles PR-UD and PR-UC, it is possible to create an elegant wavy ceiling.

DOWNLIGHT OR LOUDSPEAKER PROFILE

Ø According to order
or perforated on the
middle area
Ø3.5/25 %

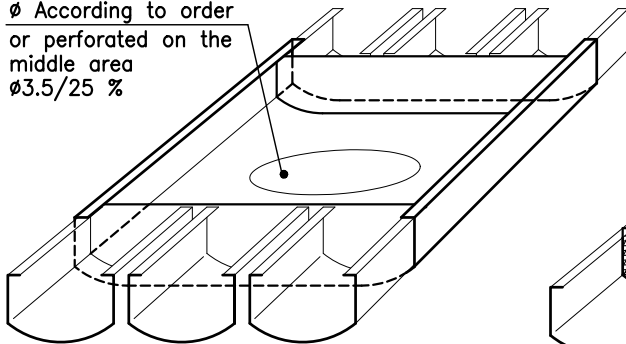

LOUDSPEAKER PROFILE

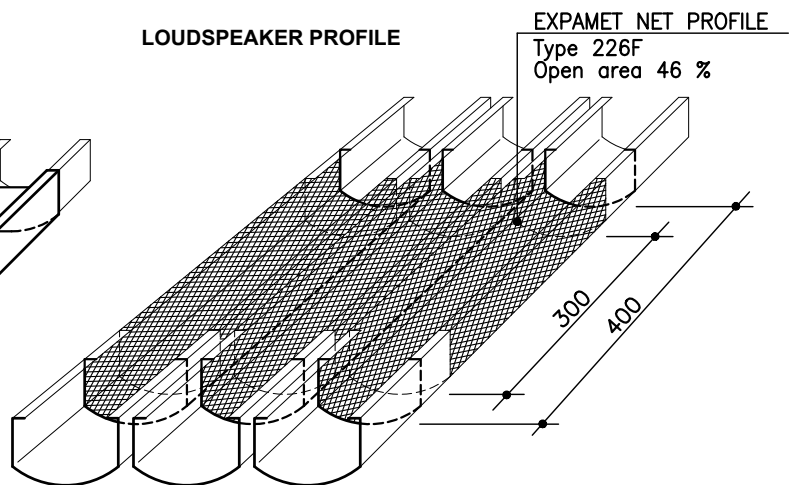

SOLUTION OF PROFILE EXTENSION AND PROFILE CONNECTION TO WALL PLEASE SEE "Lautex marine profiles typical details"

THEORETICAL NEED OF SUSPENSION STRUCTURES

Product	Need of material
Carrier No. 44	1.2 – 1.6 m/m ²
Carrier lock	1 pcs / carrier meter

WEIGHT OF PROFILES KG / M²

	PR-UD, 0.7 Al		
Width	70 mm	110 mm	200 mm
Weight	3.54	3.15	2.67

WEIGHT OF OTHER CEILING MATERIALS

Product	Weight of material
Mineral wool in plastic	0.52 kg/m ²
Carrier No. 44	0.83 kg/m
Carrier lock	0.08 kg/pcs