


LAUTEX SUSPENSION SYSTEMS FOR PROFILES

SYSTEM A

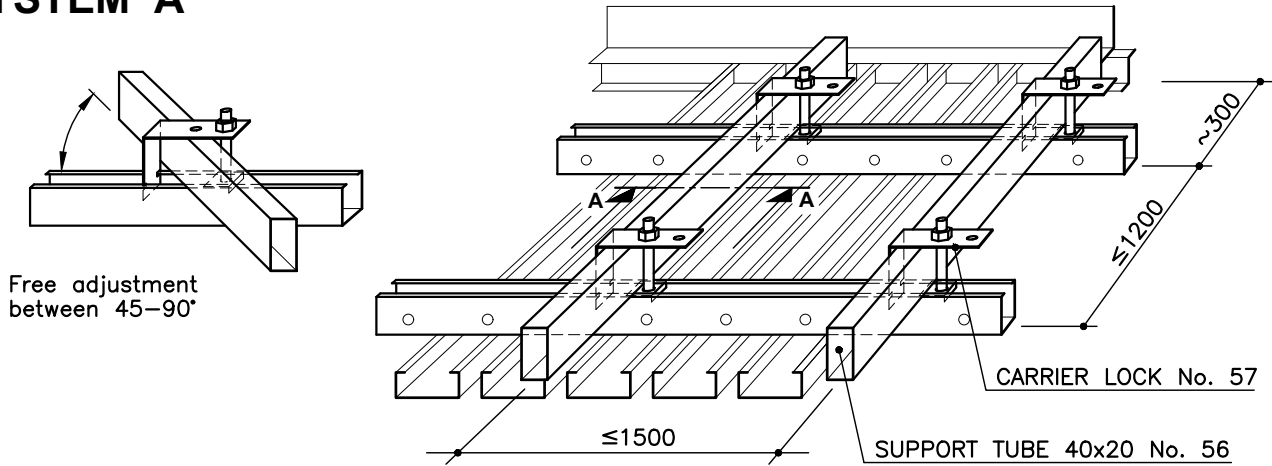

SUPPORT TUBE
No. 56

CARRIER LOCK
No. 57


CARRIER LOCK
No. 64 OR 65

150

PROFILE

PROFILE

SYSTEM B

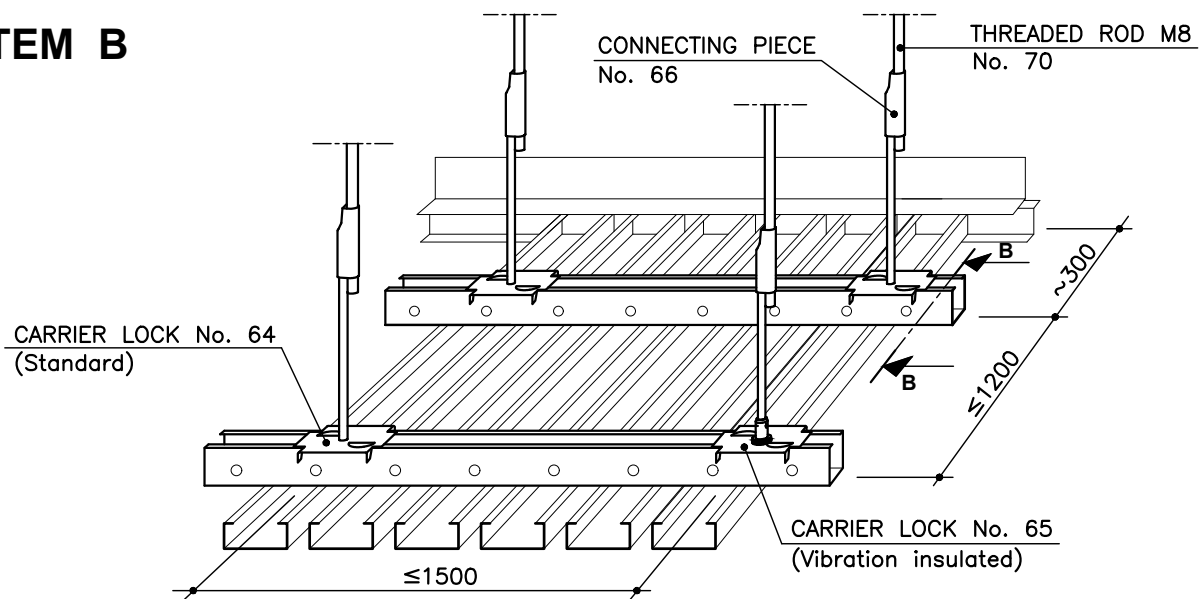


LAUTEX CURVED CEILINGS AND DIAGONAL INSTALLATION

CURVED PROFILE CEILINGS


The profile ceilings can be curved using our PR-carrier No. 88A ... X.

The minimum radius depends on profile width and air space.

Ideal for narrow profiles e.g. for PR-P

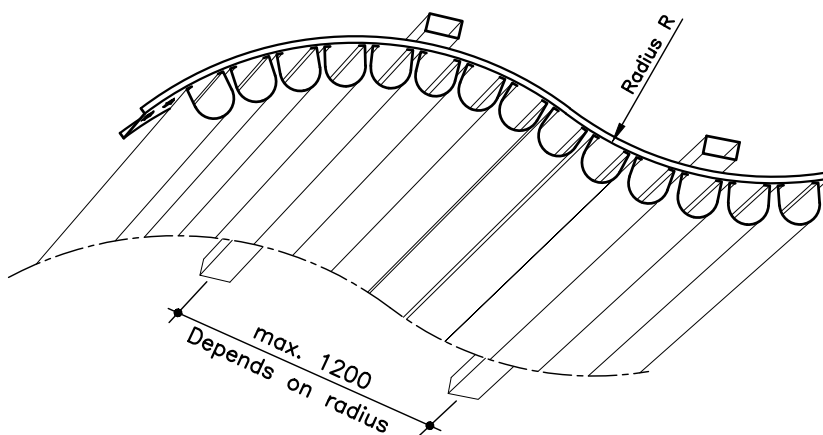


Support tube No. 56

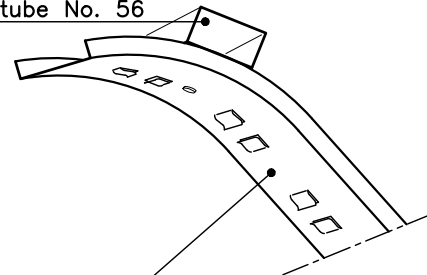

PR-carrier No. 88A...X

Radius R according to order
but minimum R=600mm

SCREW No. 76 Support tube




Carrier

DIAGONAL INSTALLATION


The profile ceilings can be installed diagonally in 45° using our PR-carrier No. 39C ... X.

Profile and air space according to order, but minimum profile width is 50 mm and air space should be 10 mm or more.

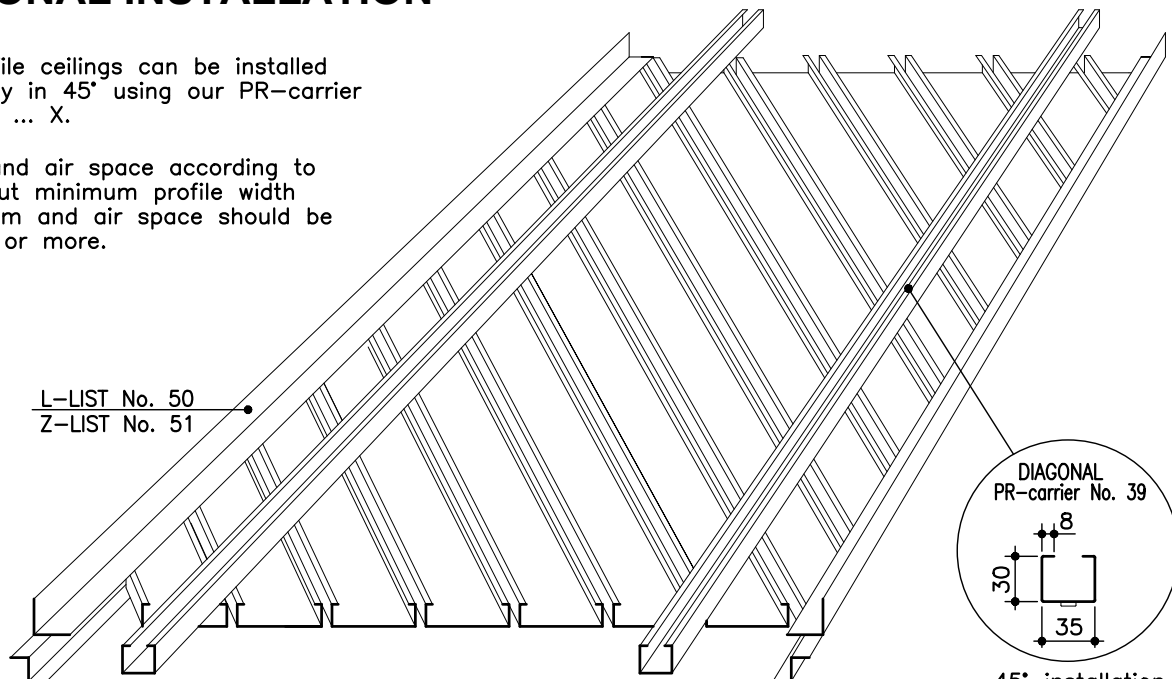



L-LIST No. 50
Z-LIST No. 51

DIAGONAL
PR-carrier No. 39



45° installation

RADIAL INSTALLATION OF LAUTEX PROFILES

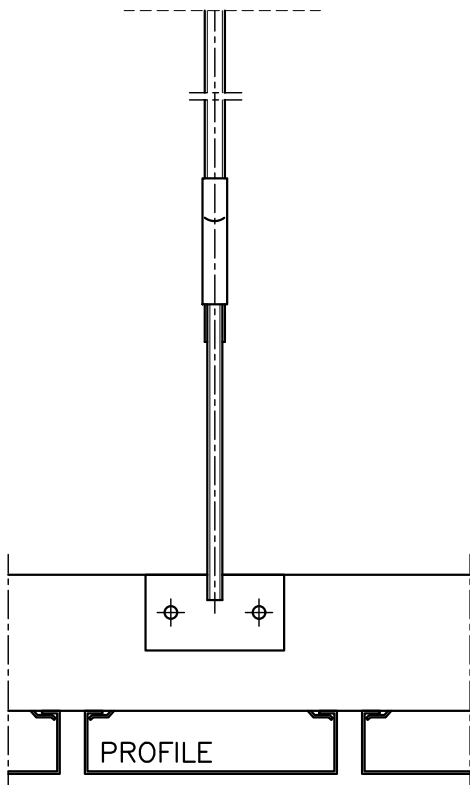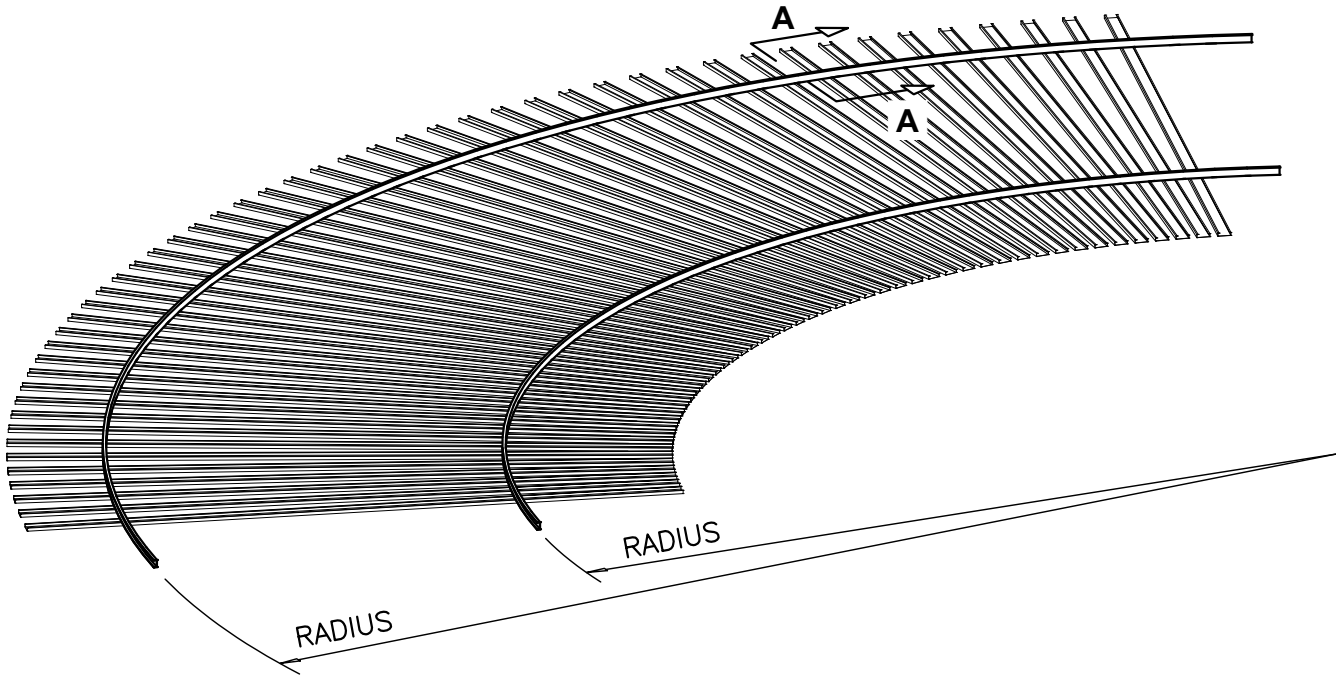

THREADED ROD M8
No. 70

CONNECTING PIECE
No. 66

CARRIER LOCK
No. 68

BENT PR-CARRIER
No. 89

SECTION A - A

