

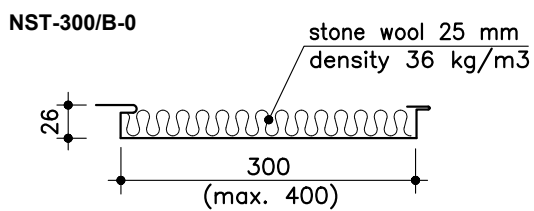



MARINE PANEL LAUTEX NST-300 / B-0 / A-30 DECK

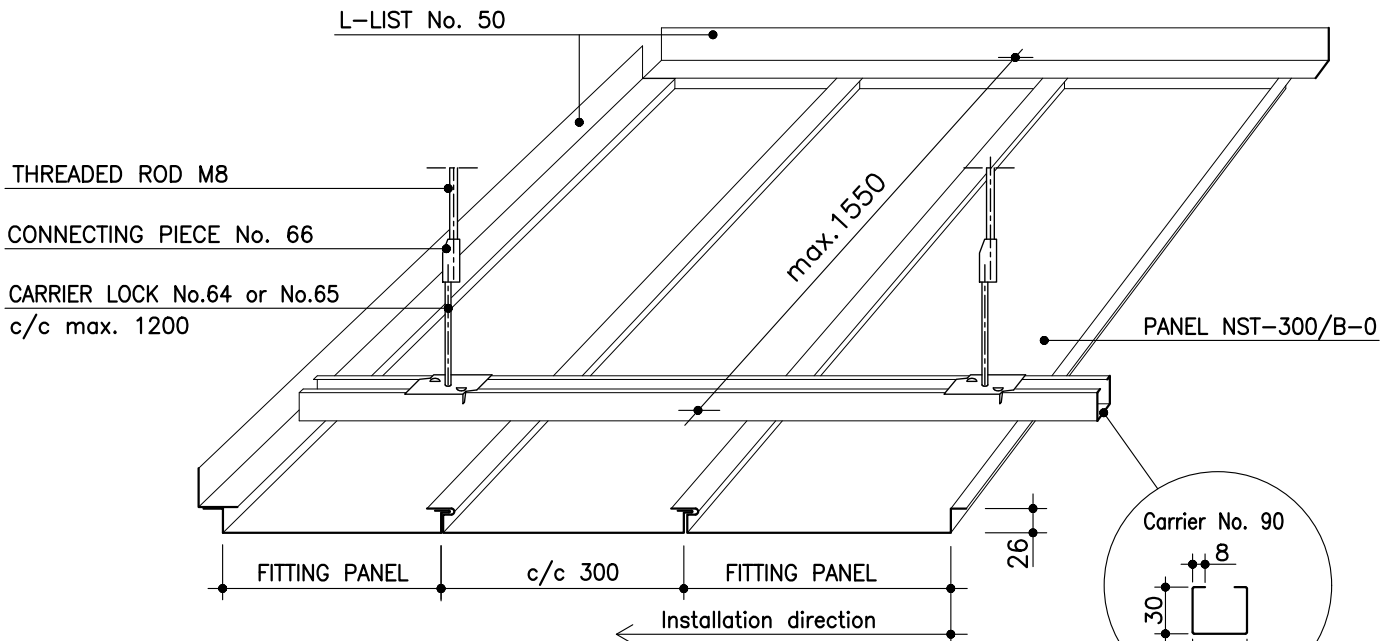

FITTING PANELS
End panel

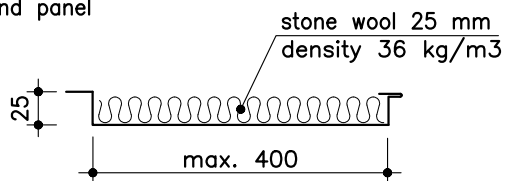

FITTING PANELS
Start panel

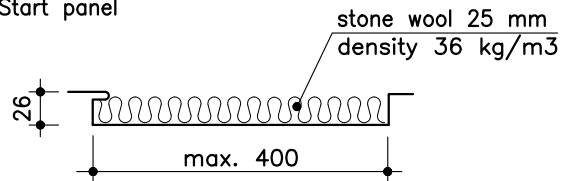


NST-300 PANELS / CLASSIFICATION "B-0"


Material	0.6 mm steel
Width	300 mm, fittings max 400 mm
Height	26 mm
Length	max 3200 mm
Insulation	stone wool, density 36 kg/m ³ , s=25 mm
Finish	NCS S or RAL color
Protective film	standard
End bendings	standard
Other solutions	please contact Lautex sales




MARINE PANEL LAUTEX NST-300 / B-0 / A-30 DECK

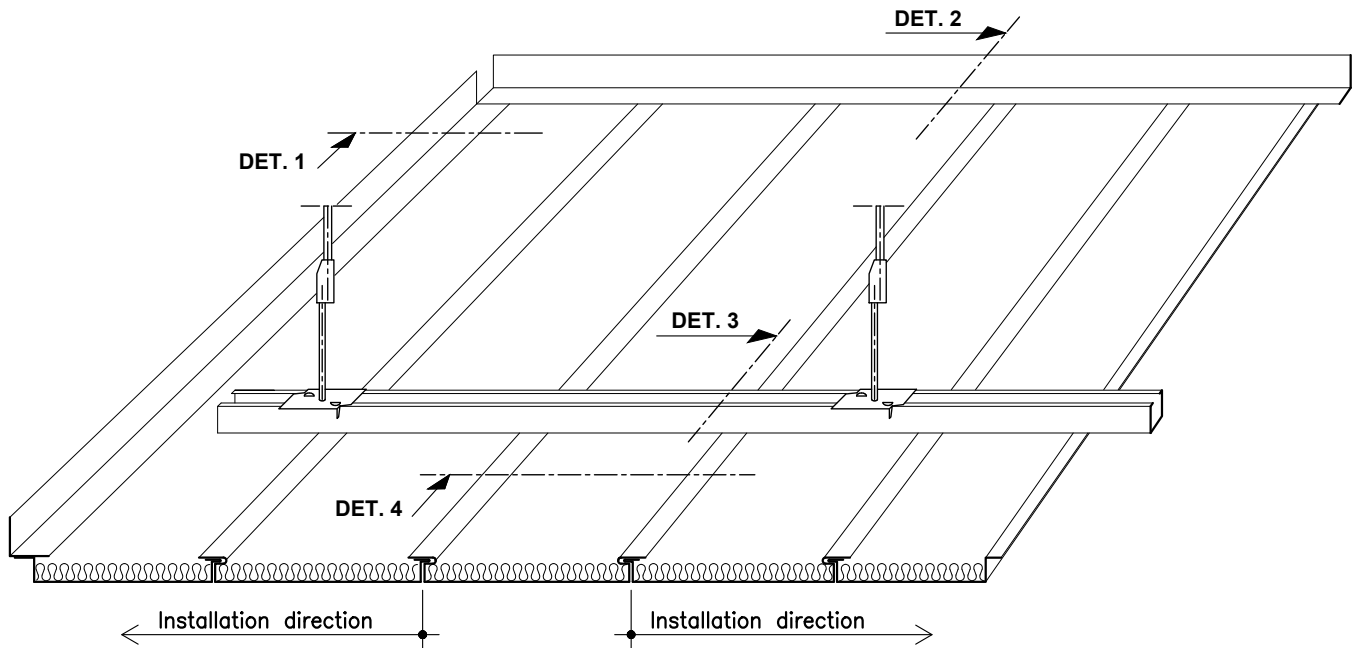

DET. 1

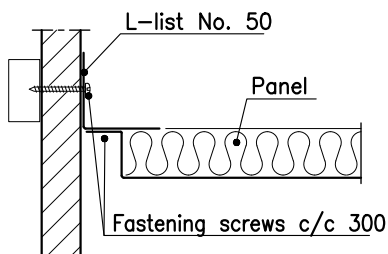


DET. 2 (ALT. 1)




DET. 2 (ALT. 2)


Panels cut: with Z- and U-insert

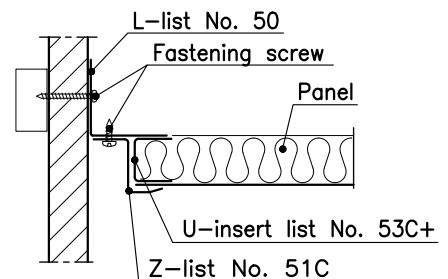

DET. 3




DET. 3
Panel joint





DET. 4



Change of installation direction in the middle of the area

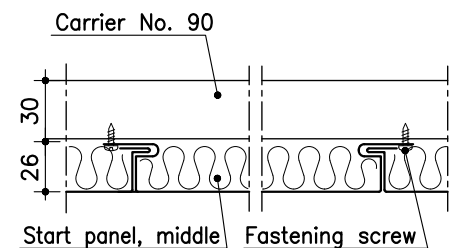


MARINE PANEL LAUTEX NST-300 / B-0 / A-30 DECK

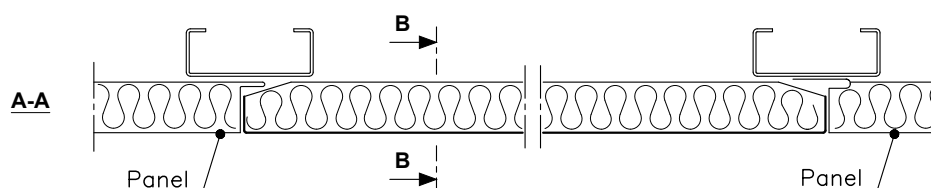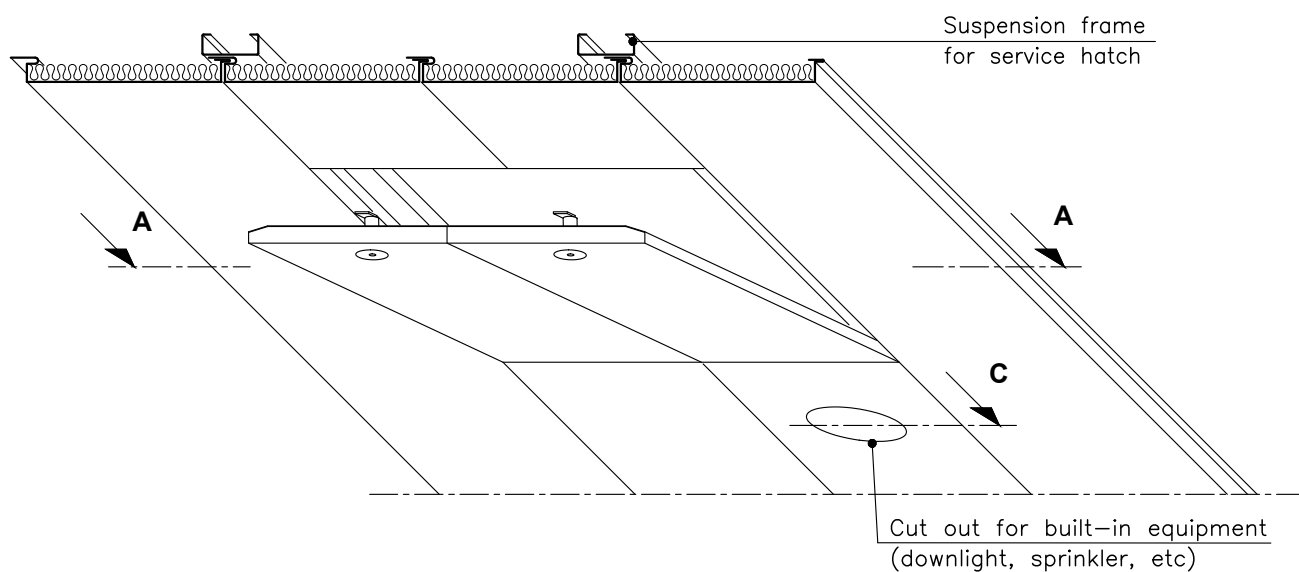

SERVICE HATCH
600x600 mm
900x900 mm

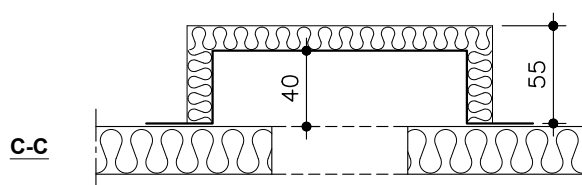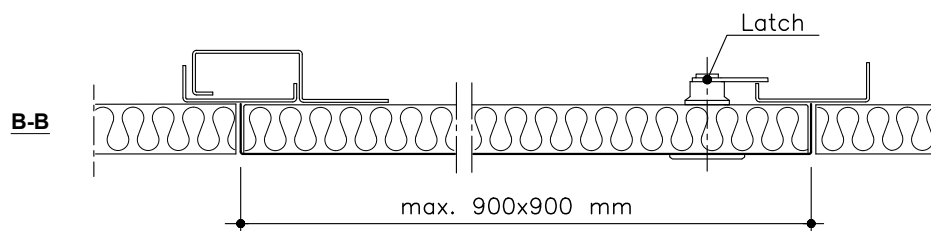

COVER BOX FOR EQUIPMENT
eg. 160x450 h=55 or 270x250 h=95

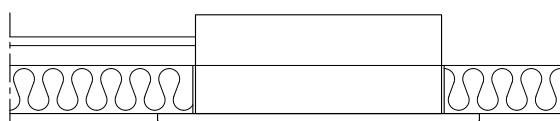


Cover box is not needed
when using B0 class equipment




MARINE PANEL LAUTEX NST-300 / B-0 / A-30 DECK

ACCESSORIES


No. 90 CARRIER




No. 50 L-LIST




No. 51C Z-LIST




No. 53C+ U-INSERT LIST




No. 66 CONNECTING PIECE




No. 70 THREADED ROD M8



No. 64 CARRIER LOCK



**No. 65 CARRIER LOCK
VIBRATION INSULATED**



THEORETICAL NEED OF SUSPENSION STRUCTURES

Product	Need of material
Carrier No. 90	1.0 – 0.7 m/m ²
Carrier lock	1 pcs / carrier meter
L-list No. 50	0.8 – 1.4 m/m ²
Z-list No. 51C	0 – 1.4 m/m ²
Screw 4.2X13 No.75	~8 pcs /m ²

WEIGHT OF PANELS KG / M2

Panel	NST-300/B-0
Material	0.6 mm steel 25 mm stone wool
Weight	7.54 kg

WEIGHT OF OTHER CEILING MATERIALS

Carrier No. 90	0.83 kg/m
Carrier lock	0.08 kg/pcs
L-list No. 50 (1.0 mm steel)	0.64 kg/m
Z-list No. 51C (1.0 mm steel)	0.52 kg/m
U-insert No. 53C+ (0.6 mm steel)	0.30 kg/m

