

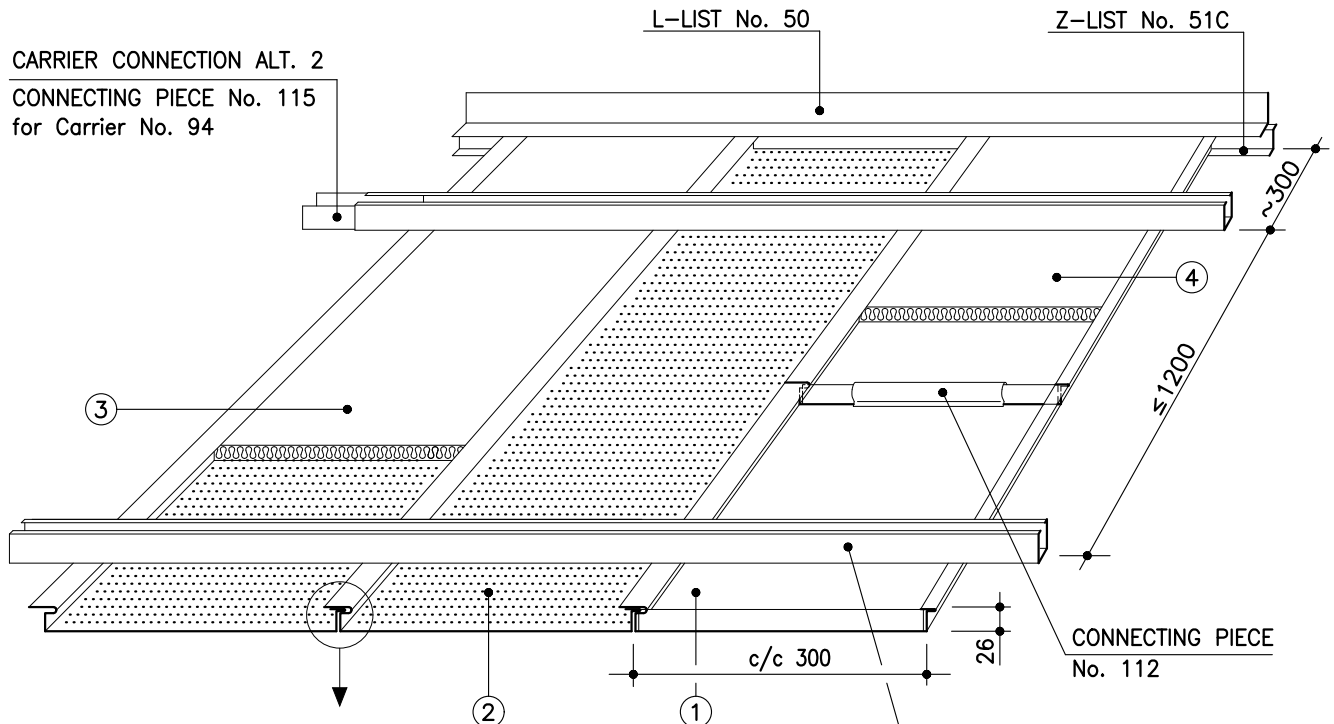
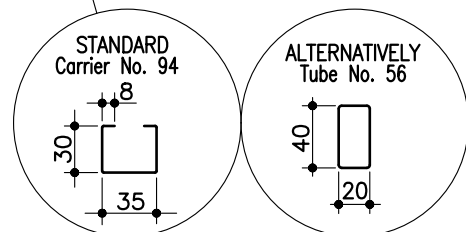


MARINE PANEL LAUTEX NS-300

CARRIER CONNECTION ALT. 2
CONNECTING PIECE No. 115
for Carrier No. 94

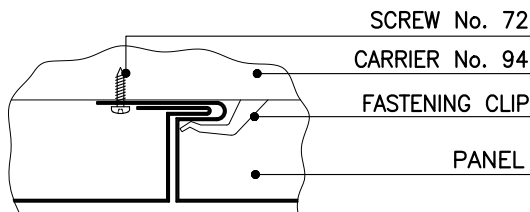

INSTALLATION WITH TUBE OR CARRIER

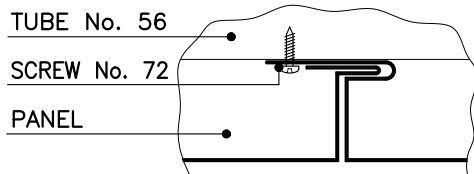

- ① = NS; unperforated without acoustic inlay
- ② = NSR; perforated on the bottom
- ③ = NSRT; perforated and mineral wool in plastic
- ④ = NST; unperforated and mineral wool in plastic


NS-300 PANELS / CLASSIFICATION "C"

Material	0.6 Steel 0.7 Al
Width	300 mm
Height	26 mm
Length	max. 3200 mm
Perforation	please contact our technical information department
Inlay	mineral wool in plastic
Finish	stove enamelled (or anodized) according to any well-known colour chart
Protective film	the surface is provided with a protective film if required
End bendings	standard for straight cut ends
Service hatch	see overleaf
Loudspeaker panel	see overleaf
Downlight unit	see overleaf
Connecting piece	No.112, see above and page 28
Suspension	see "Suspension systems for panels" page 27
Edge lists	see group 6 "Lautex lists" and page 28 "Lautex marinen panels typical details"
Other solutions	please contact our technical information department


MARINE PANEL LAUTEX NS-300

INSTALLATION ACCESSORIES

LOUDSPEAKER OR DOWNLIGHT PANEL

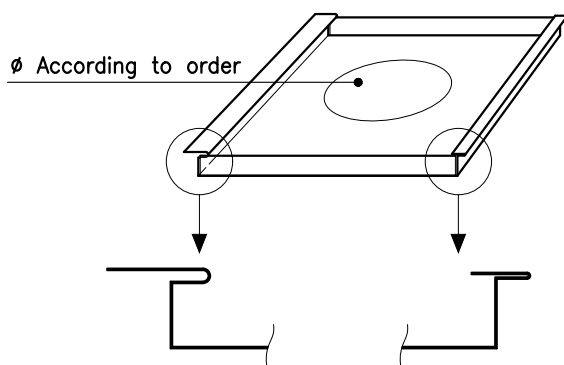


Perforated on the whole bottom $\varnothing 3.5/25\%$

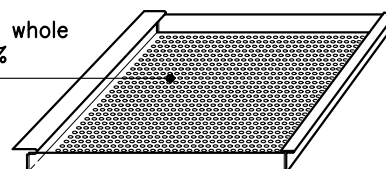

STANDARD SERVICE HATCHES

LENGTH x WIDTH (opening in the ceiling)
600 x 600

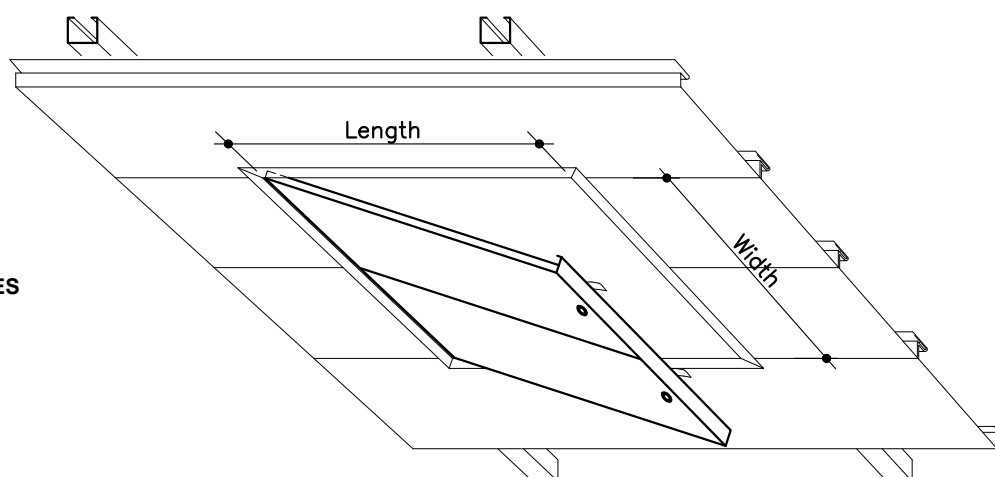

SOLUTIONS OF PANEL EXTENSION AND PANEL CONNECTION TO WALL PLEASE SEE PAGE 28

THEORETICAL NEED OF SUSPENSION STRUCTURES

Product	Need of material
Carrier No. 94	1.2 – 1.6 m/m ²
Tube No. 56	1.2 – 1.6 m/m ²
Carrier lock	1 pcs/carrier meter
L-list No. 50	0.8 – 1.4 m/m ²
Z-list No. 51C	0.8 – 1.4 m/m ²
U-insert list No. 53C+	0.8 – 1.4 m/m ²

WEIGHT OF PANELS KG / M²

	NS-300	
Material	0.7 Al	0.6 Steel
Weight	2.61	6.64

WEIGHT OF OTHER CEILING MATERIALS

Product	Weight of material
Mineral wool in plastic	0.52 kg/m ²
Carrier No. 94	0.83 kg/m
Support tube 40x20	1.37 kg/m
Carrier lock	0.08 kg/pcs
L-list No. 50 or 83 (1.5 Al)	0.32 kg/m
L-list No. 50 or 83 (1.0 steel)	0.62 kg/m
Z-list No. 51C (1.0 Al)	0.16 kg/m
U-insert list No. 53C+ (0.7 Al)	0.12 kg/m