


MARINE PROFILE LAUTEX PR-P

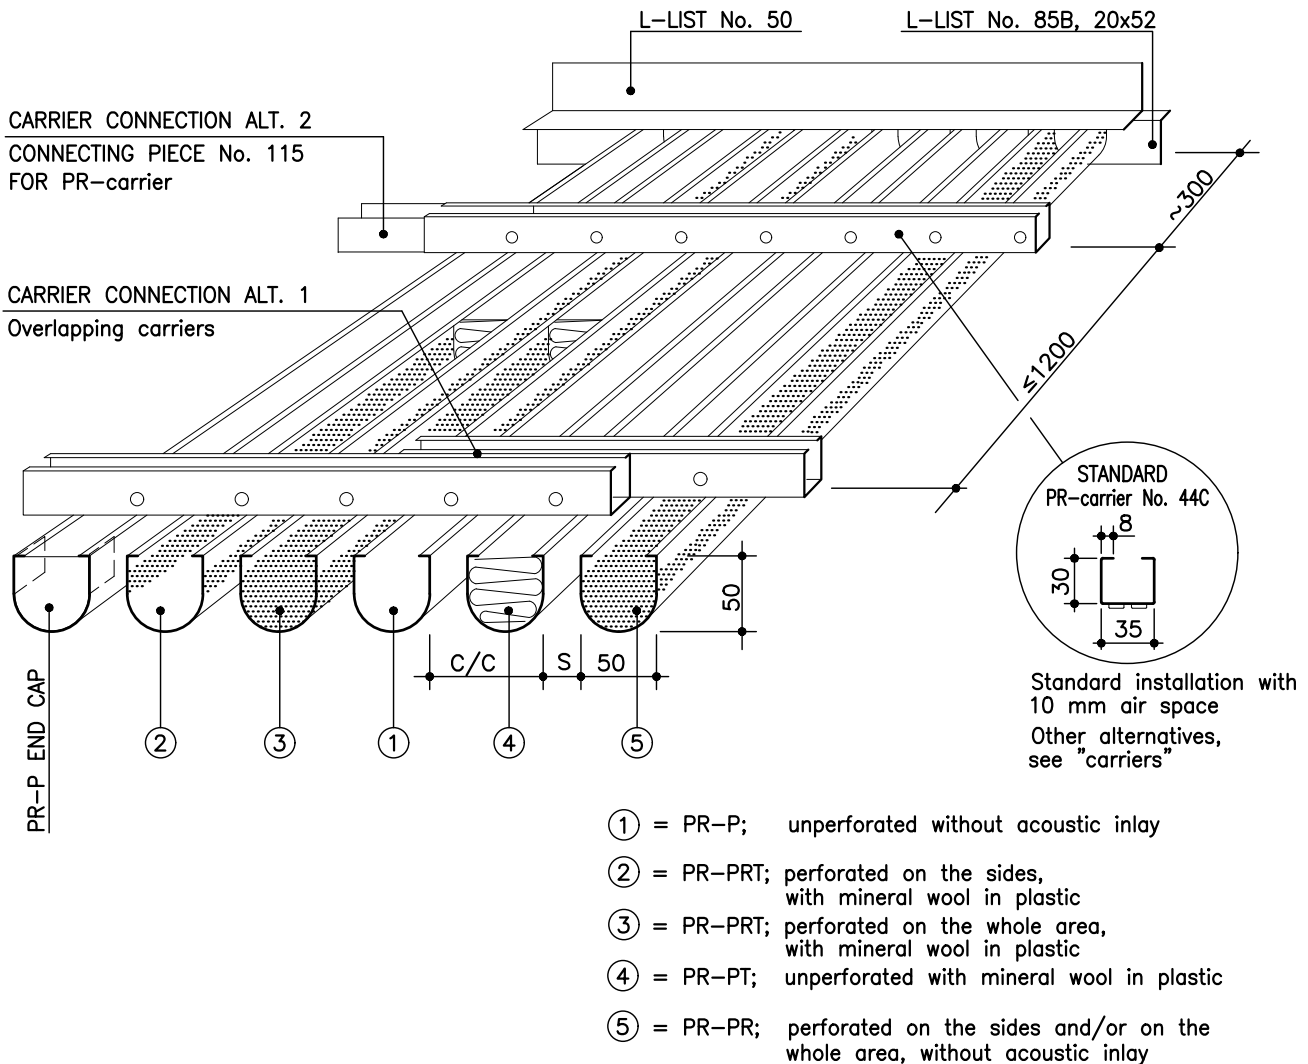


PR-P PROFILES / CLASSIFICATION "C"


Material	0.7 Al	0.5 Steel
Width	50 mm	
Height	50 mm	
Length	max 6500 mm	
Air spaces	recommended air space = 10 mm also according to order, but ≥ 10 mm	
Perforation	$\varnothing 2.0/15\%$, $\varnothing 1.1/21\%$ (only AL) other alternatives see "perforations"	
Inlay	mineral wool in plastic	
Finish	NCS S or RAL color	
Protective film	the surface is provided with a protective film if required	
Connection piece	No. 189C	
Curved ceilings	see "Curved ceiling and diagonal installation"	
Suspension	see "Suspension system for profiles"	
Edge lists	see "Lautex lists" and "Lautex marine profiles typical details"	
Diagonal installation	PR-carrier No. 39C for diagonal installation in 45° , air space according to order but ≥ 10 mm, see "Curved ceiling and diagonal installation"	
Other solutions	please contact Lautex sales	

MARINE PROFILE LAUTEX PR-P INSTALLATION ACCESSORIES


INSTALLATION WITH AIR SPACE 10 MM

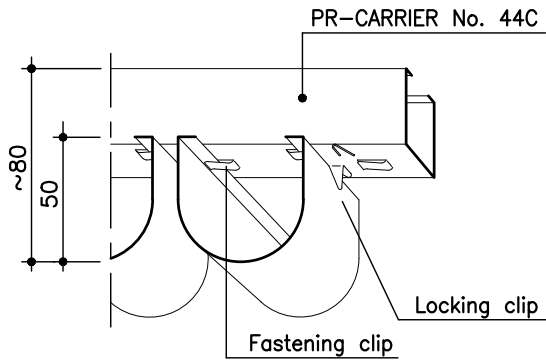

DOWNLIGHT OR LOUNDSPEAKER PROFILE

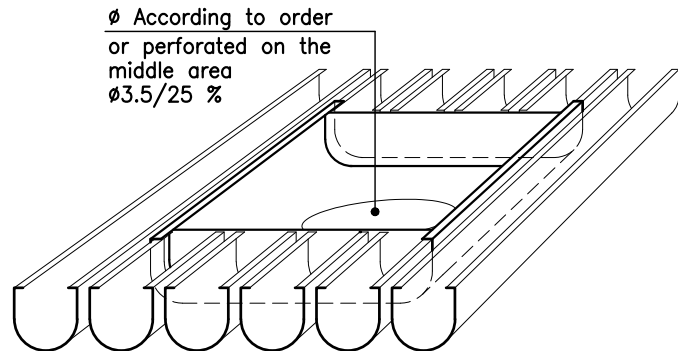

LOUDSPEAKER PROFILE

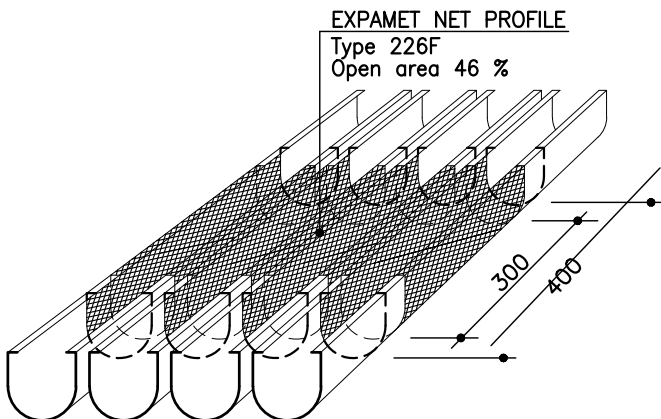

SOLUTION OF PROFILE EXTENSION AND PROFILE CONNECTION TO WALL PLEASE SEE "Lautex marine profiles typical details"

THEORETICAL NEED OF SUSPENSION STRUCTURES

Product	Need of material
Carrier No. 44C	1.2 – 1.6 m/m ²
Carrier lock	1 pcs / carrier meter
L-list No. 50	0.8 – 1.4 m/m ²
L-list 20x52	0.8 – 1.4 m/m ²

WEIGHT OF PROFILES KG / M²

	PR-P	
Material	0.7 Al	0.5 Steel
Weight	4.41	9.33

WEIGHT OF OTHER CEILING MATERIALS

Product	Weight of material
Mineral wool in plastic	0.52 kg/m ²
Carrier No. 44C, 39C	0.83 kg/m
Carrier lock	0.08 kg/pcs
L-list No. 50 or 83 (1.5 AL)	0.32 kg/pcs
L-list No. 50 or 83 (1.0 steel)	0.62 kg/pcs
L-list No.85B, 20x52 (1.0 AL)	0.19 kg/pcs