



MARINE CASSETTE LAUTEX RL-585

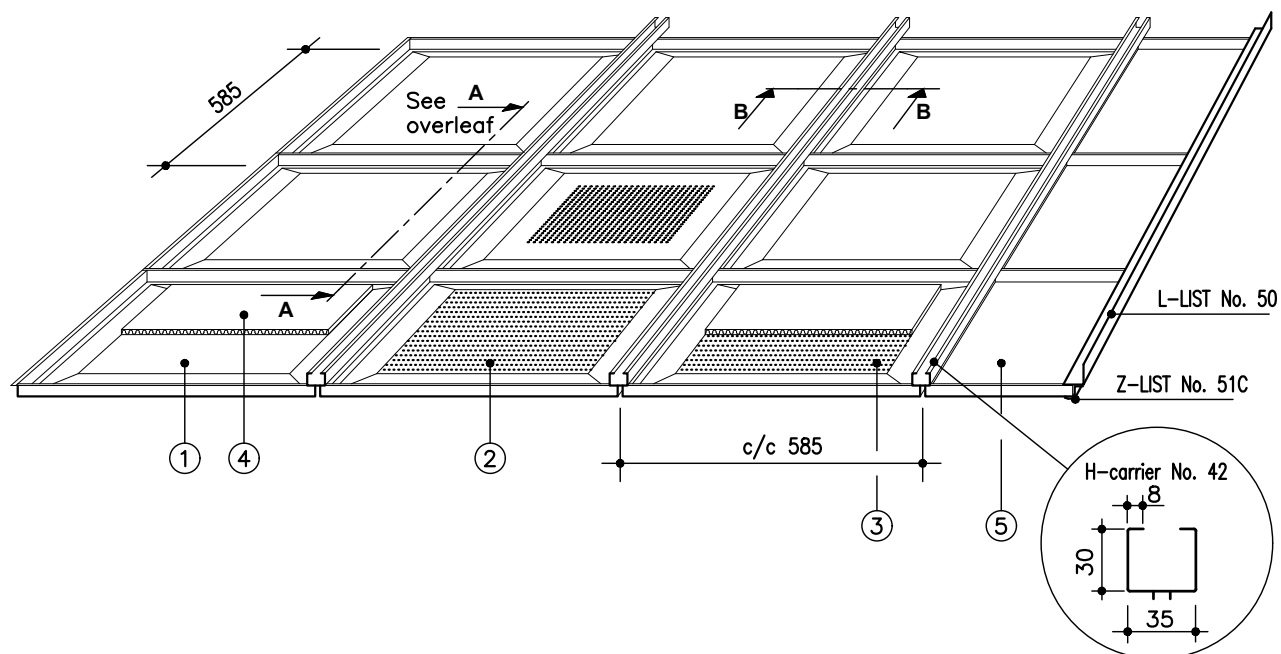


- ① = RL-585; unperforated without
- ② = RLR-585; perforated without acoustic inlay
- ③ = RLRT-585; perforated, with mineral wool in plastic
- ④ = RLT-585; unperforated, with mineral wool in plastic
- ⑤ = NL-585; fitting cassette NL-585 (0.7 Al)

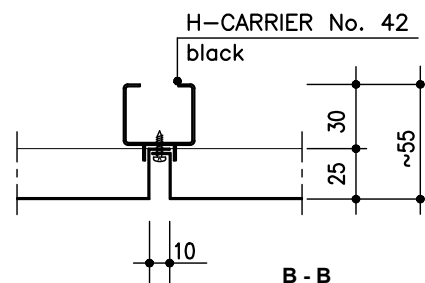

RL-585 CASSETTES / CLASSIFICATION "C"

Material	0.5 Steel
Module	585 x 585 mm
Height	25 mm
Perforation	Ø3.5 mm
Inlay	mineral wool in plastic or acoustic felt
Finish	NCS S or RAL color
Ventilation	installation also with air space
Protective film	the surface is provided with a protective film if required
Loudspeaker	perforated cassette with Ø3.5/25%, middle area
Edge lists	see "Lautex lists" and "Lautex marine cassette typical details"
Suspensions	see "Suspension systems for L-type cassettes"
Other solutions	please contact Lautex sales

MARINE CASSETTE LAUTEX RL-585 INSTALLATION ACCESSORIES

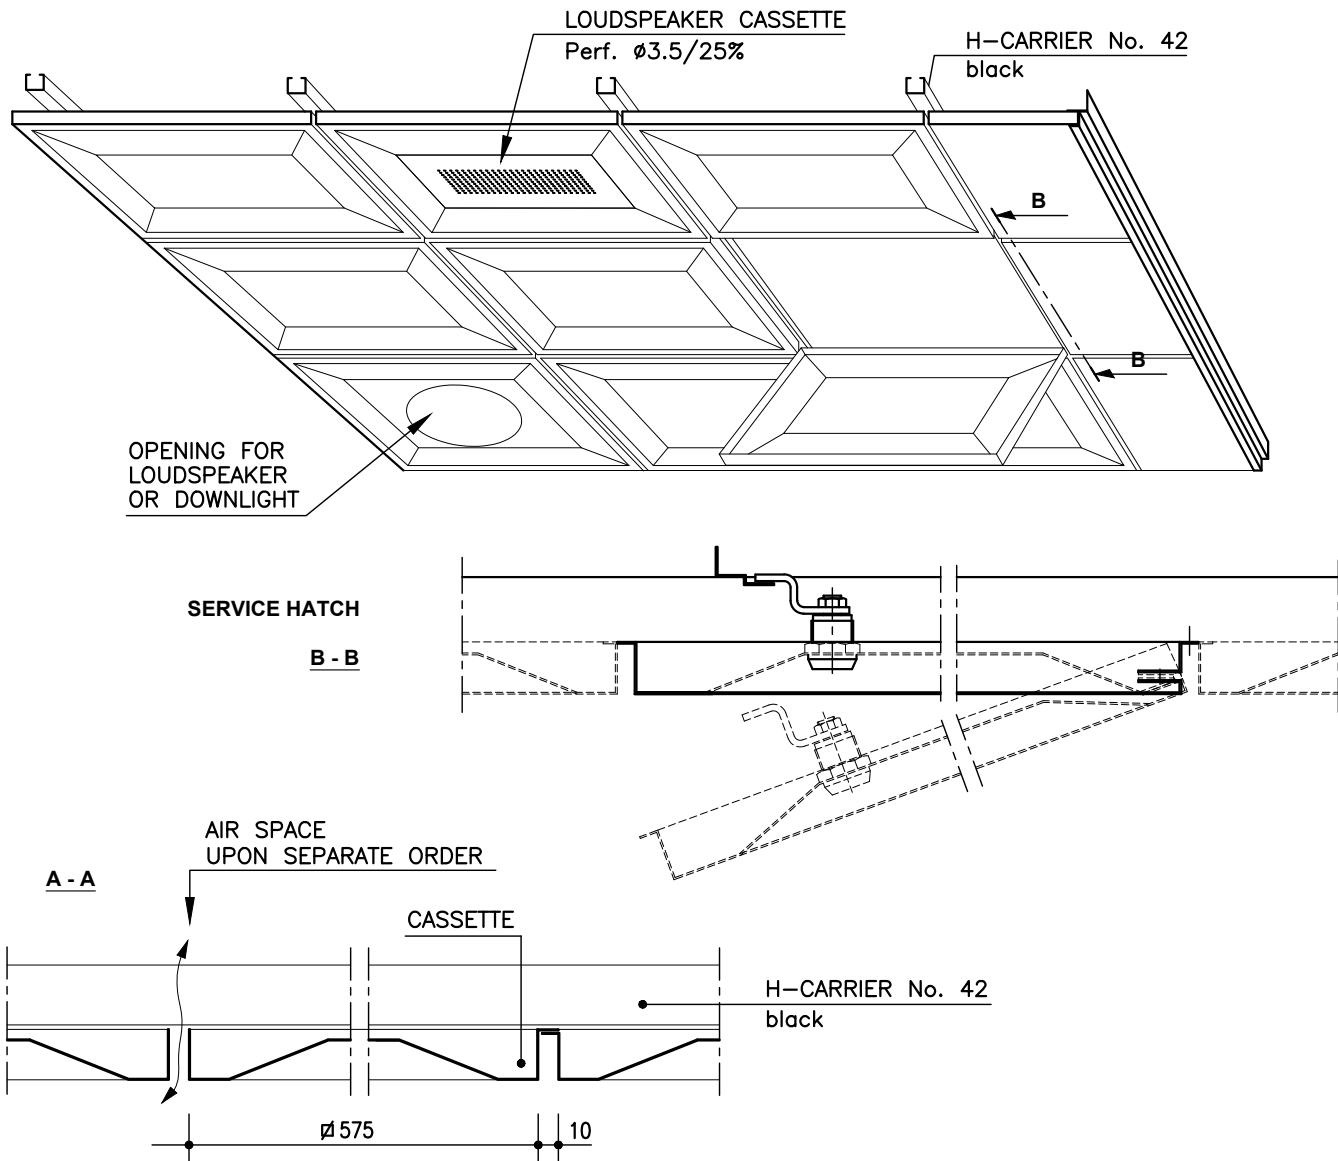

CASSETTE CONNECTION TO WALL PLEASE SEE PAGE 21

THEORETICAL NEED OF SUSPENSION STRUCTURES

Product	Need of material
Carrier No. 42	1.8 m/m ²
L-list No. 50	0.8 – 1.4 m/m ²
Z-list No. 51C	0.8 – 1.4 m/m ²

WEIGHT OF CEILING

Cassette	RL-585
Material	0.5 Steel
Weight	4.4 Kg/m ²

WEIGHT OF OTHER CEILING MATERIALS

Product	Weight of material
Carrier No. 42 (1.0 Steel)	0.83 kg/m
L-list No. 50 or 83 (1.5 Al)	0.32 kg/m
L-list No. 50 or 83 (1.0 steel)	0.62 kg/m
Z-list No. 51C (1.0 Al)	0.15 kg/m
Mineral wool in plastic	0.52 kg/m ²